


flexy^{HO}

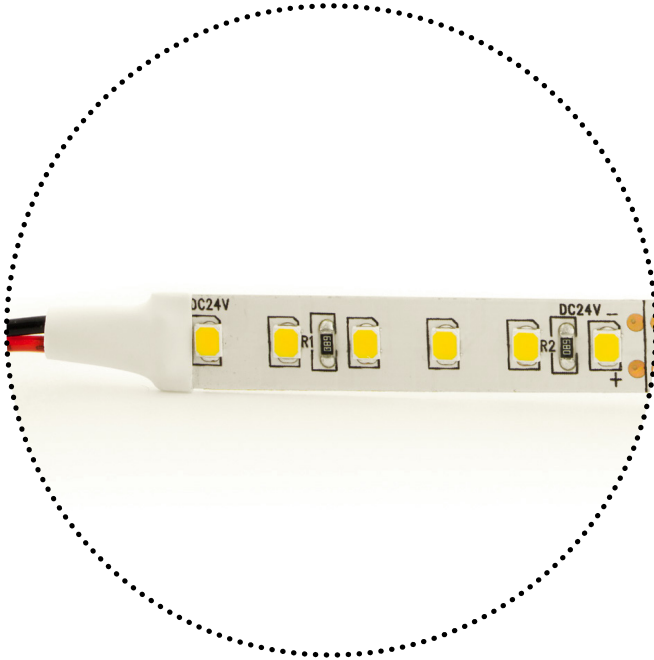

RANGE	QBO FLEXY HO
REF.	01192-
TYPE	LEDSTRIP
DIMENSIONS	10 x 5000 mm
CUT UNIT	50 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	5000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	(ø 0,5 mm) 1500 mm
GAP BETWEEN LEDS	5 mm
WEIGHT	0,130 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	19,2 W
SERVICE LIFE	> 50.000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	80
MACADAM ELLIPSE	2
LPM	120 lpm
OPENING DEGREES	140 °
WARRANTY	5 YEARS

*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	1850	96,4
2700	1900	99
3000	1950	101,6
4000	2050	106,8
6500	1970	102,6



CODE	DESCRIPTION
0119222580	LEDSTRIP FLEXY HO 19,2W/m 2200K 5m Ra80 1850lm/m 120leds/m IP20 24V
0119227580	LEDSTRIP FLEXY HO 19,2W/m 2700K 5m Ra80 1900lm/m 120leds/m IP20 24V
0119230580	LEDSTRIP FLEXY HO 19,2W/m 3000K 5m Ra80 1950lm/m 120leds/m IP20 24V
0119240580	LEDSTRIP FLEXY HO 19,2W/m 4000K 5m Ra80 2050lm/m 120leds/m IP20 24V
0119265580	LEDSTRIP FLEXY HO 19,2W/m 6500K 5m Ra80 1970lm/m 120leds/m IP20 24V

