


flexy HO IP

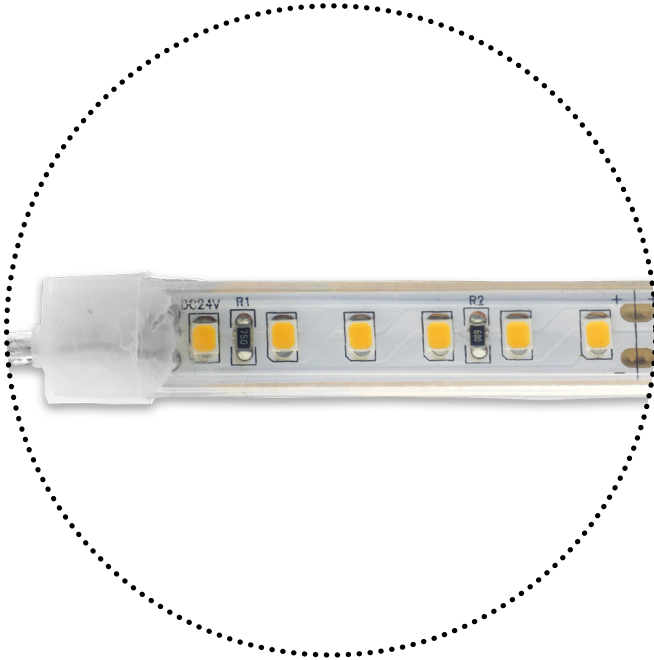

RANGE	QBO FLEXY HO
REF.	01192-
TYPE	LEDSTRIP
DIMENSIONS	13 x 5000 mm
CUT UNIT	50 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	5000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	($\phi=0,5$ mm) 1500 mm
GAP BETWEEN LEDS	5 mm
WEIGHT	0,540 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	19,2 W
SERVICE LIFE	> 50.000 HRS
IP RATING	IP68
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	80
MACADAM ELLIPSE	2
LPM	120 lpm
OPENING DEGREES	140 °
WARRANTY	5 YEARS

*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	1360	70,8
2700	1450	75,5
3000	1480	77,1
4000	1500	78,1
6500	1480	77,1



CODE	DESCRIPTION
011922258068	LEDSTRIP FLEXY HO IP 19,2W/m 2200K 5m Ra80 1360lm/m 120leds/m IP68 24V
011922758068	LEDSTRIP FLEXY HO IP 19,2W/m 2700K 5m Ra80 1450lm/m 120leds/m IP68 24V
011923058068	LEDSTRIP FLEXY HO IP 19,2W/m 3000K 5m Ra80 1480lm/m 120leds/m IP68 24V
011924058068	LEDSTRIP FLEXY HO IP 19,2W/m 4000K 5m Ra80 1500lm/m 120leds/m IP68 24V
011926558068	LEDSTRIP FLEXY HO IP 19,2W/m 6500K 5m Ra80 1480lm/m 120leds/m IP68 24V

