


flexy HO SLIM

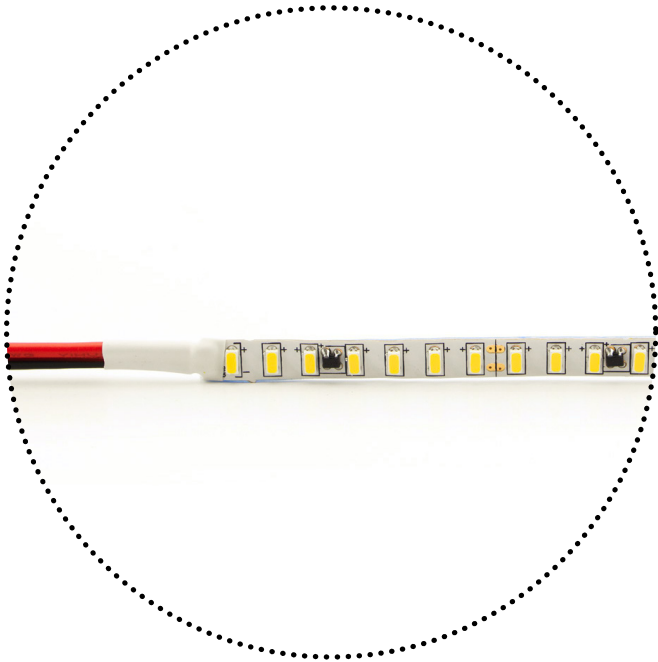

RANGE	QBO FLEXY HO SLIM
REF.	03130-
TYPE	LEDSTRIP
DIMENSIONS	5 x 5000 mm
CUT UNIT	33 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	5000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	($\phi=0,5$ mm) 3000 mm
GAP BETWEEN LEDS	3 mm
WEIGHT	0,105 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	13 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	95
MACADAM ELLIPSE	1
LPM	210 lpm
OPENING DEGREES	140°
WARRANTY	5 YEARS

*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	1000	76,9
2700	1100	84,6
3000	1150	88,5
4000	1200	92,3
6500	1180	90,8



CODE	DESCRIPTION
0313022595	LEDSTRIP FLEXY HO slim 13W/m 2200K 5m Ra95 1000lm/m 210leds/m IP20 24V
0313027595	LEDSTRIP FLEXY HO slim 13W/m 2700K 5m Ra95 1100lm/m 210leds/m IP20 24V
0313030595	LEDSTRIP FLEXY HO slim 13W/m 3000K 5m Ra95 1150lm/m 210leds/m IP20 24V
0313040595	LEDSTRIP FLEXY HO slim 13W/m 4000K 5m Ra95 1200lm/m 210leds/m IP20 24V
0313065595	LEDSTRIP FLEXY HO slim 13W/m 6500K 5m Ra95 1180lm/m 210leds/m IP20 24V

