


## flexy HO SLIM

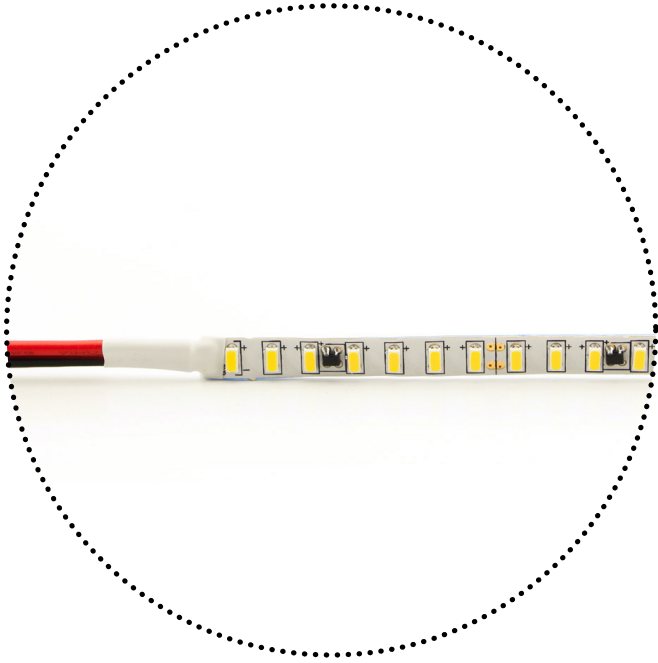

RANGE	QBO FLEXY HO SLIM
REF.	03200-
TYPE	LEDSTRIP
DIMENSIONS	5 x 5000 mm
CUT UNIT	33 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	5000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	( $\varnothing=0,5$ mm) 3000 mm
GAP BETWEEN LEDS	3 mm
WEIGHT	0,105 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	20 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	95
MACADAM ELLIPSE	1
LPM	210 lpm
OPENING DEGREES	140°
WARRANTY	5 YEARS

\*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	1800	90
3000	1900	95
4000	2000	100



CODE	DESCRIPTION
0320027195	LEDSTRIP FLEXY HO slim 20W/m 2700K 1m Ra95 1800lm/m 120leds/m IP20 24V
0320030195	LEDSTRIP FLEXY HO slim 20W/m 3000K 1m Ra95 1900lm/m 120leds/m IP20 24V
0320040195	LEDSTRIP FLEXY HO slim 20W/m 4000K 1m Ra95 2000lm/m 120leds/m IP20 24V

