


flexy MEDIUM

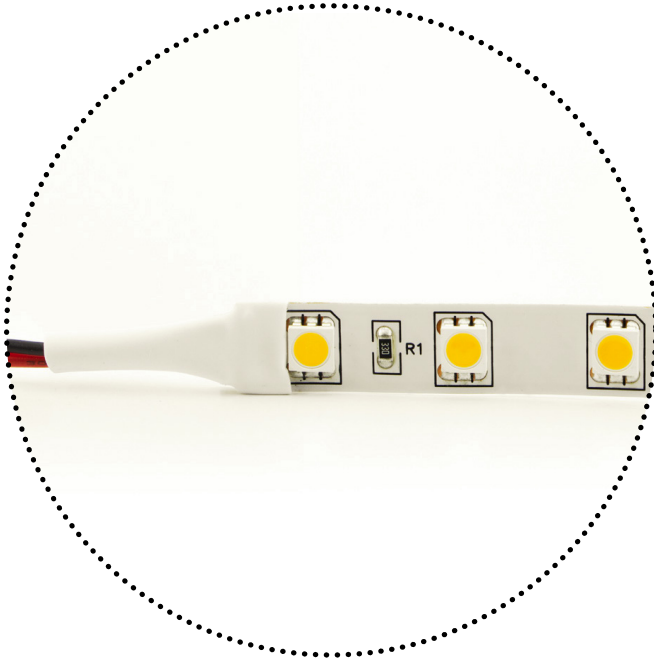

RANGE	QBO FLEXY MEDIUM
REF.	04144-
TYPE	LEDSTRIP
DIMENSIONS	10 x 5000 mm
CUT UNIT	100 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	($\phi=0,5$ mm) 3000 mm
GAP BETWEEN LEDS	12 mm
WEIGHT	0,135 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	14,4 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	90
MACADAM ELLIPSE	2
LPM	60 lpm
OPENING DEGREES	120 °
WARRANTY	5 YEARS

*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	970	67,4
2700	1010	70,1
3000	1050	72,9
4000	1070	74,3
6500	1065	74



CODE	DESCRIPTION
0414422590	LEDSTRIP FLEXY Medium 14,4W/m 2200K 5m Ra90 970lm/m 60leds/m IP20 24V
0414427590	LEDSTRIP FLEXY Medium 14,4W/m 2700K 5m Ra90 1010lm/m 60leds/m IP20 24V
0414430590	LEDSTRIP FLEXY Medium 14,4W/m 3000K 5m Ra90 1050lm/m 60leds/m IP20 24V
0414440590	LEDSTRIP FLEXY Medium 14,4W/m 4000K 5m Ra90 1070lm/m 60leds/m IP20 24V
0414465590	LEDSTRIP FLEXY Medium 14,4W/m 6500K 5m Ra90 1065lm/m 60leds/m IP20 24V

