


flexy MEDIUM IP

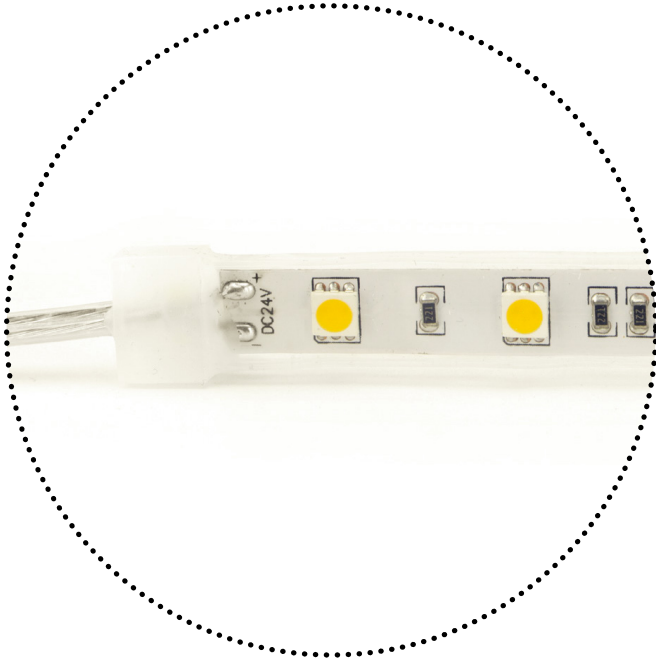

| | |
|---|--------------------------|
| RANGE | QBO FLEXY MEDIUM |
| REF. | 04144- |
| TYPE | LEDSTRIP |
| DIMENSIONS | 13 x 5000 mm |
| CUT UNIT | 100 mm |
| MINIMUM BENDING DIAMETRE | 50 mm |
| MAXIMUM RUN LENGTH | 10000 mm |
| MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH) | ($\phi=0,5$ mm) 3000 mm |
| GAP BETWEEN LEDS | 12 mm |
| WEIGHT | 0,290 Kg |
| VOLTAGE | 24 V |
| DIMMABLE | YES |
| POWER | 14,4 W |
| SERVICE LIFE | > 50000 HRS |
| IP RATING | IP67 |
| LIGHTING DISTRIBUTION | DIRECT / INDIRECT |
| CRI | 90 |
| MACADAM ELLIPSE | 5 |
| LPM | 60 lpm |
| OPENING DEGREES | 120 ° |
| WARRANTY | 5 YEARS |

*DOES NOT NEED DISSIPATION

| COLOR TEMPERATURE (K) | LIGHTING FLUX (lm) | LUMINOUS EFFICACY (lm/W) |
|-----------------------|--------------------|--------------------------|
| 2200 | 945 | 65,6 |
| 2700 | 990 | 68,8 |
| 3000 | 1030 | 71,5 |
| 4000 | 1060 | 73,6 |
| 6500 | 1050 | 72,9 |



| CODE | DESCRIPTION |
|--------------|--|
| 041442259067 | LEDSTRIP FLEXY Medium 14,4W/m 2200K 5m Ra90 945lm/m 60leds/m IP67 24V |
| 041442759067 | LEDSTRIP FLEXY Medium 14,4W/m 2700K 5m Ra90 990lm/m 60leds/m IP67 24V |
| 041443059067 | LEDSTRIP FLEXY Medium 14,4W/m 3000K 5m Ra90 1030lm/m 60leds/m IP67 24V |
| 041444059067 | LEDSTRIP FLEXY Medium 14,4W/m 4000K 5m Ra90 1060lm/m 60leds/m IP67 24V |
| 041446559067 | LEDSTRIP FLEXY Medium 14,4W/m 6500K 5m Ra90 1050lm/m 60leds/m IP67 24V |

