


21x21 luminaire suspended



RANGE	PROFILE 21X21 LUMINAIRE
REF.	QBOP21X21SY-
TYPE	SUSPENDED MOUNTING
DIMENSIONS	21x 21x 2000 mm
MATERIAL	ALUMINUM
FINISH	WHITE / ALUMINUM / BLACK
VOLTAGE	220 - 240 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	INCLUDED
DIMMABLE	YES
POWER	38,4 W
POWER FACTOR	0,95
SERVICE LIFE	30.000 h
INSULATION CLASS	CLASS II
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT
COLOR TEMPERATURE	2700 / 3000 / 4000 K
CRI	80
LIGHTING FLUX	3800 / 3900 / 4100 lm
LUMINOUS EFFICACY	99 / 101,6 / 106,8 lm/W

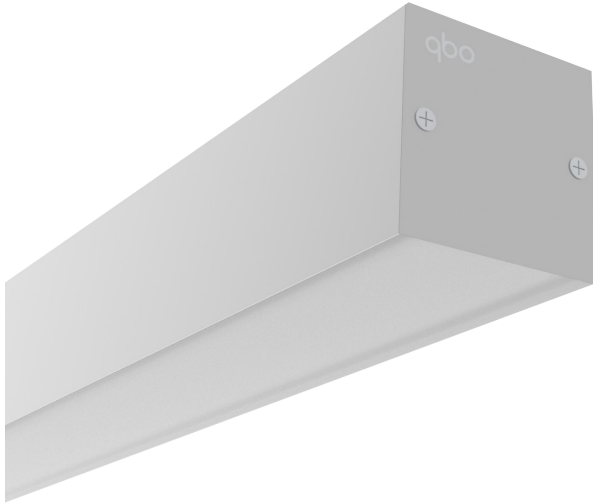

CODE	DESCRIPTION
QBOP21X21SY2780D200000	PROFILE 21X21 suspended 38,4 W 2700K Ra80 3800lm IP20 dali 2000lm white
QBOP21X21SY3080D200000	PROFILE 21X21 suspended 38,4 W 3000K Ra80 3900lm IP20 dali 2000lm white
QBOP21X21SY4080D200000	PROFILE 21X21 suspended 38,4 W 4000K Ra80 4100lm IP20 dali 2000lm white
QBOP21X21SY2780D200001	PROFILE 21X21 suspended 38,4 W 2700K Ra80 3800lm IP20 dali 2000lm aluminum
QBOP21X21SY3080D200001	PROFILE 21X21 suspended 38,4 W 3000K Ra80 3900lm IP20 dali 2000lm aluminum
QBOP21X21SY4080D200001	PROFILE 21X21 suspended 38,4 W 4000K Ra80 4100lm IP20 dali 2000lm aluminum
QBOP21X21SY2780D200009	PROFILE 21X21 suspended 38,4 W 2700K Ra80 3800lm IP20 dali 2000lm black
QBOP21X21SY3080D200009	PROFILE 21X21 suspended 38,4 W 3000K Ra80 3900lm IP20 dali 2000lm black
QBOP21X21SY4080D200009	PROFILE 21X21 suspended 38,4 W 4000K Ra80 4100lm IP20 dali 2000lm black

