
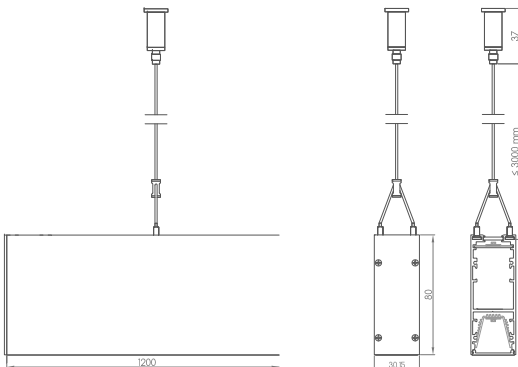


## 2+1 luminaire

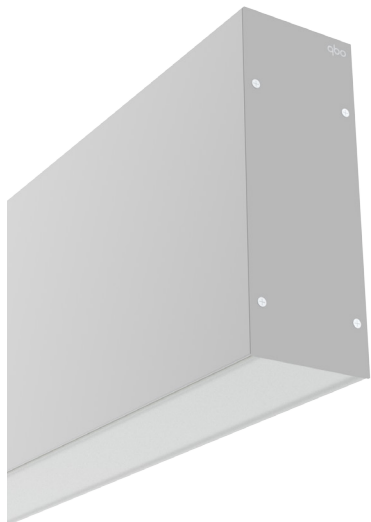

RANGE	PROFILE 2+1 LUMINAIRE
REF.	QBOP2+1Y-
TYPE	SUSPENDED MOUNTING
DIMENSIONS	80x 30,15x 1500 mm
MATERIAL	ALUMINIUM
FINISH	ALUMINIUM
VOLTAGE	120 - 277 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	INCLUDED
DIMMABLE	NO
POWER	43,2 W
POWER FACTOR	0,95
SERVICE LIFE	30.000 h
INSULATION CLASS	CLASS II
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT + INDIRECT
COLOR TEMPERATURE	2700 K
CRI	80

CE

### RA80 DIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	2850	99
3000	2925	101,6
4000	3075	106,8

### RA80 INDIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	1165	81,2
3000	1175	81,8
4000	1215	84,4

CODE	DESCRIPTION
QBOP2+1Y2780150000	PROFILE 2+1 suspended 43,2W 2700K Ra80 d2850lm i1165lm IP20 1500 mm White
QBOP2+1Y3080150000	PROFILE 2+1 suspended 43,2W 3000K Ra80 d2925lm i1175lm IP20 1500 mm White
QBOP2+1Y4080150000	PROFILE 2+1 suspended 43,2W 4000K Ra80 d3075lm i1215lm IP20 1500 mm White
QBOP2+1Y2780150001	PROFILE 2+1 suspended 43,2W 2700K Ra80 d2850lm i1165lm IP20 1500 mm Aluminum
QBOP2+1Y3080150001	PROFILE 2+1 suspended 43,2W 3000K Ra80 d2925lm i1175lm IP20 1500 mm Aluminum
QBOP2+1Y4080150001	PROFILE 2+1 suspended 43,2W 4000K Ra80 d3075lm i1215lm IP20 1500 mm Aluminum
QBOP2+1Y2780150009	PROFILE 2+1 suspended 43,2W 2700K Ra80 d2850lm i1165lm IP20 1500 mm Black
QBOP2+1Y3080150009	PROFILE 2+1 suspended 43,2W 3000K Ra80 d2925lm i1175lm IP20 1500 mm Black
QBOP2+1Y4080150009	PROFILE 2+1 suspended 43,2W 4000K Ra80 d3075lm i1215lm IP20 1500 mm Black