



2+1 luminaire

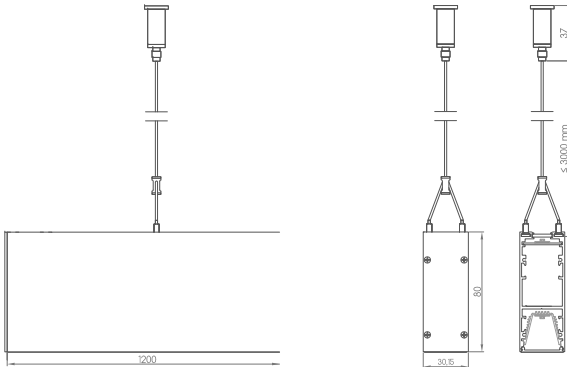

RANGE	PROFILE 2+1 LUMINAIRE
REF.	QBOP2+1Y-
TYPE	SUSPENDED MOUNTING
DIMENSIONS	80x 30,15x 1200 mm
MATERIAL	ALUMINIUM
FINISH	ALUMINIUM
VOLTAGE	220 - 240 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	INCLUDED
DIMMABLE	YES
POWER	34,56 W
POWER FACTOR	0,95
SERVICE LIFE	30.000 h
INSULATION CLASS	CLASS II
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT + INDIRECT
COLOR TEMPERATURE	2700 / 3000 / 4000 K
CRI	80

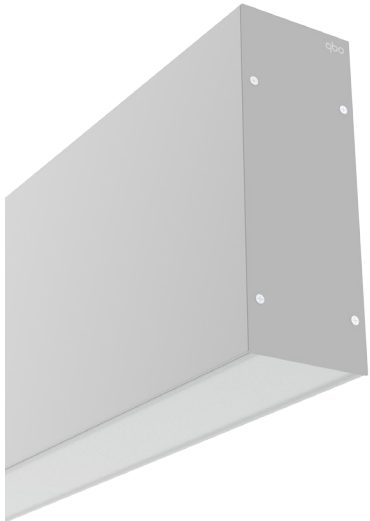

RA80 DIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	2280	99
3000	2340	101,6
4000	2460	106,8

RA80 INDIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	935	81,2
3000	940	81,8
4000	970	84,4

CODE	DESCRIPTION
QBOP2+1Y2780D120000	PROFILE 2+1 suspended 34,6W 2700K Ra80 d2280lm i935lm IP20 dali 1200mm White
QBOP2+1Y3080D120000	PROFILE 2+1 suspended 34,6W 3000K Ra80 d2340lm i940lm IP20 dali 1200mm White
QBOP2+1Y4080D120000	PROFILE 2+1 suspended 34,6W 4000K Ra80 d2460lm i970lm IP20 dali 1200mm White
QBOP2+1Y2780D120001	PROFILE 2+1 suspended 34,6W 2700K Ra80 d2280lm i935lm IP20 dali 1200mm Aluminum
QBOP2+1Y3080D120001	PROFILE 2+1 suspended 34,6W 3000K Ra80 d2340lm i940lm IP20 dali 1200mm Aluminum
QBOP2+1Y4080D120001	PROFILE 2+1 suspended 34,6W 4000K Ra80 d2460lm i970lm IP20 dali 1200mm Aluminum
QBOP2+1Y2780D120009	PROFILE 2+1 suspended 34,6W 2700K Ra80 d2280lm i935lm IP20 dali 1200mm Black
QBOP2+1Y3080D120009	PROFILE 2+1 suspended 34,6W 3000K Ra80 d2340lm i940lm IP20 dali 1200mm Black
QBOP2+1Y4080D120009	PROFILE 2+1 suspended 34,6W 4000K Ra80 d2460lm i970lm IP20 dali 1200mm Black