
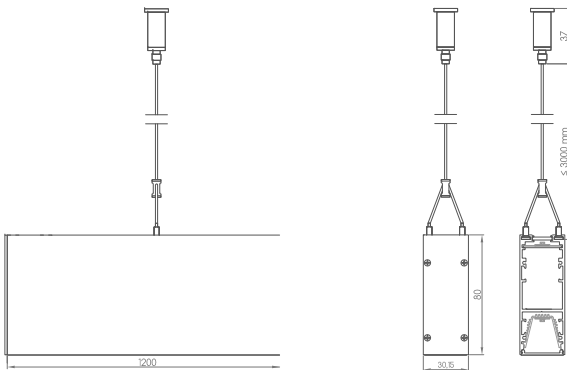


2+1 luminaire

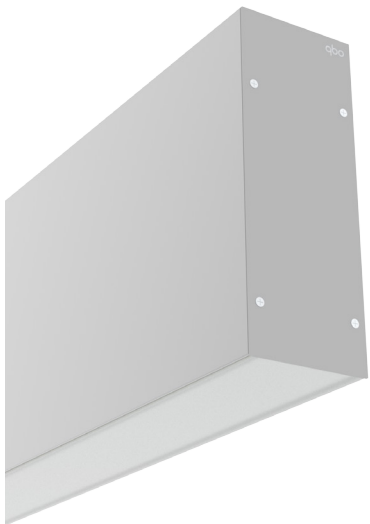

RANGE	PROFILE 2+1 LUMINAIRE
REF.	QBOP2+1Y-
TYPE	SUSPENDED MOUNTING
DIMENSIONS	80x 30,15x 2000 mm
MATERIAL	ALUMINIUM
FINISH	ALUMINIUM
VOLTAGE	220 - 240 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	INCLUDED
DIMMABLE	YES
POWER	57,6 W
POWER FACTOR	0,95
SERVICE LIFE	30.000 h
INSULATION CLASS	CLASS II
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT + INDIRECT
COLOR TEMPERATURE	2700 / 3000 / 4000 K
CRI	80

CE

RA80 DIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	3800	99
3000	3900	101,6
4000	4100	106,8

RA80 INDIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	1555	81,2
3000	1570	81,8
4000	1620	84,4

CODE	DESCRIPTION
QBOP2+1Y2780D2000	PROFILE 2+1 suspended 57,6W 2700K Ra80 d3800lm i1555lm IP20 dali 2000mm White
QBOP2+1Y3080D2000	PROFILE 2+1 suspended 57,6W 3000K Ra80 d3900lm i1570lm IP20 dali 2000mm White
QBOP2+1Y4080D2000	PROFILE 2+1 suspended 57,6W 4000K Ra80 d4100lm i1620lm IP20 dali 2000mm White
QBOP2+1Y2780D2001	PROFILE 2+1 suspended 57,6W 2700K Ra80 d3800lm i1555lm IP20 dali 2000mm Aluminum
QBOP2+1Y3080D2001	PROFILE 2+1 suspended 57,6W 3000K Ra80 d3900lm i1570lm IP20 dali 2000mm Aluminum
QBOP2+1Y4080D2001	PROFILE 2+1 suspended 57,6W 4000K Ra80 d4100lm i1620lm IP20 dali 2000mm Aluminum
QBOP2+1Y2780D2009	PROFILE 2+1 suspended 57,6W 2700K Ra80 d3800lm i1555lm IP20 dali 2000mm Black
QBOP2+1Y3080D2009	PROFILE 2+1 suspended 57,6W 3000K Ra80 d3900lm i1570lm IP20 dali 2000mm Black
QBOP2+1Y4080D2009	PROFILE 2+1 suspended 57,6W 4000K Ra80 d4100lm i1620lm IP20 dali 2000mm Black