


p2+1 pro luminaire



RANGE	PROFILE 2+1 PRO LUMINAIRE
REF.	QBOP2+1PROY-
TYPE	SUSPENDED MOUNTING
DIMENSIONS	65 x 85 x 1200 mm
MATERIAL	ALUMINUM
FINISHED	WHITE / ALUMINUM / BLACK
VOLTAGE	100 - 277 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	INCLUDED
DIMMABLE	NO
POWER	TRACK: 3000 W / LED STRIPS: 54,24 W
SERVICE LIFE	30.000 h
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT + INDIRECT
COLOR TEMPERATURE	2700 / 3000 / 4000 K
CRI	>90
LIGHTING FLUX	DIRECT LED STRIP: 2635 / 2760 / 2875 lm INDIRECT LED STRIP: 2035 / 2085 / 2135 lm

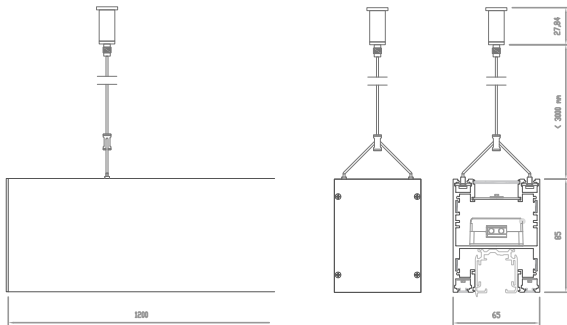

RA95 DIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	2635	84,6
3000	2760	88,5
4000	2875	92,3

RA90 INDIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	2035	88,5
3000	2085	90,6
4000	2135	92,7

CODE	DESCRIPTION
------	-------------

QBOP2+1PROYTID2790120000	PROFILE 2+1 PRO suspended T: 3000W L: 54,24W 2700K Ra95/90 D2635lm I2035lm IP20 1200mm white
QBOP2+1PROYTID3090120000	PROFILE 2+1 PRO suspended T: 3000W L: 54,24W 3000K Ra95/90 D2760lm I2085lm IP20 1200mm white
QBOP2+1PROYTID4090120000	PROFILE 2+1 PRO suspended T: 3000W L: 54,24W 4000K Ra95/90 D2875lm I2135lm IP20 1200mm white
QBOP2+1PROYTID2790120001	PROFILE 2+1 PRO suspended T: 3000W L: 54,24W 2700K Ra95/90 D2635lm I2035lm IP20 1200mm aluminum
QBOP2+1PROYTID3090120001	PROFILE 2+1 PRO suspended T: 3000W L: 54,24W 3000K Ra95/90 D2760lm I2085lm IP20 1200mm aluminum
QBOP2+1PROYTID4090120001	PROFILE 2+1 PRO suspended T: 3000W L: 54,24W 4000K Ra95/90 D2875lm I2135lm IP20 1200mm aluminum
QBOP2+1PROYTID2790120009	PROFILE 2+1 PRO suspended T: 3000W L: 54,24W 2700K Ra95/90 D2635lm I2035lm IP20 1200mm black
QBOP2+1PROYTID3090120009	PROFILE 2+1 PRO suspended T: 3000W L: 54,24W 3000K Ra95/90 D2760lm I2085lm IP20 1200mm black
QBOP2+1PROYTID4090120009	PROFILE 2+1 PRO suspended T: 3000W L: 54,24W 4000K Ra95/90 D2875lm I2135lm IP20 1200mm black