


## p2+1 pro luminaire



RANGE	PROFILE 2+1 PRO LUMINAIRE
REF.	QBOP2+1PROY-
TYPE	SUSPENDED MOUNTING
DIMENSIONS	65 x 85 x 1500 mm
MATERIAL	ALUMINUM
FINISHED	WHITE / ALUMINUM / BLACK
VOLTAGE	100 - 270 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	INCLUDED
DIMMABLE	NO
POWER	TRACK: 3000 W / LED STRIPS: 67,8 W
SERVICE LIFE	30.000 h
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT + INDIRECT
COLOR TEMPERATURE	2700 / 3000 / 4000 K
CRI	>90
LIGHTING FLUX	DIRECT LED STRIP: 2970lm INDIRECT LED STRIP: 1020lm

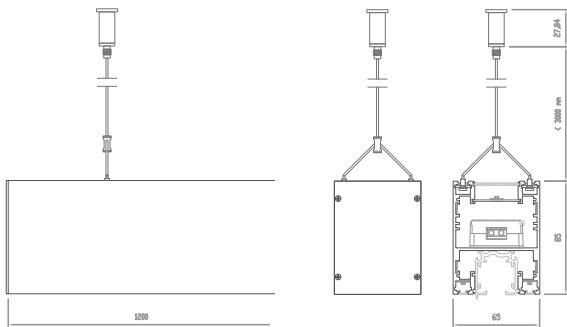

### RA95 DIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	3295	84,6
3000	3450	88,5
4000	3595	92,3

### RA90 INDIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	2545	88,5
3000	2605	90,6
4000	2665	92,7

CODE	DESCRIPTION
QBOP2+1PROYTID2790I50000	PROFILE 2+1 PRO suspended T: 3000W L: 67,8W 2700K Ra90/95 D3295lm I2545lm IP20 1500mm white
QBOP2+1PROYTID3090I50000	PROFILE 2+1 PRO suspended T: 3000W L: 67,8W 3000K Ra90/95 D3450lm I2605lm IP20 1500mm white
QBOP2+1PROYTID4090I50000	PROFILE 2+1 PRO suspended T: 3000W L: 67,8W 4000K Ra90/95 D3595lm I2665lm IP20 1500mm white
QBOP2+1PROYTID2790I50001	PROFILE 2+1 PRO suspended T: 3000W L: 67,8W 2700K Ra90/95 D3295lm I2545lm IP20 1500mm aluminum
QBOP2+1PROYTID3090I50001	PROFILE 2+1 PRO suspended T: 3000W L: 67,8W 3000K Ra90/95 D3450lm I2605lm IP20 1500mm aluminum
QBOP2+1PROYTID4090I50001	PROFILE 2+1 PRO suspended T: 3000W L: 67,8W 4000K Ra90/95 D3595lm I2665lm IP20 1500mm aluminum
QBOP2+1PROYTID2790I50009	PROFILE 2+1 PRO suspended T: 3000W L: 67,8W 2700K Ra90/95 D3295lm I2545lm IP20 1500mm black
QBOP2+1PROYTID3090I50009	PROFILE 2+1 PRO suspended T: 3000W L: 67,8W 3000K Ra90/95 D3450lm I2605lm IP20 1500mm black
QBOP2+1PROYTID4090I50009	PROFILE 2+1 PRO suspended T: 3000W L: 67,8W 4000K Ra90/95 D3595lm I2665lm IP20 1500mm black