


## p2+1 pro luminaire



RANGE	PROFILE 2+1 PRO LUMINAIRE
REF.	QBOP2+1PROY-
TYPE	SUSPENDED MOUNTING
DIMENSIONS	65 x 85 x 2000 mm
MATERIAL	ALUMINIUM
FINISHED	WHITE / ALUMINIUM / BLACK
VOLTAGE	100 - 270 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	INCLUDED
DIMMABLE	NO
POWER	TRACK: 3000 W / LED STRIPS: 90,4 W
SERVICE LIFE	30.000 h
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT + INDIRECT
COLOR TEMPERATURE	2700 / 3000 / 4000 K
CRI	>90

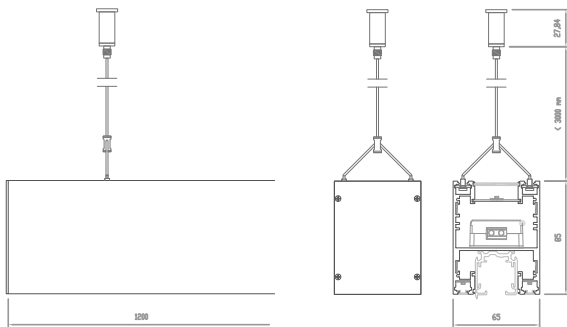

### RA95 DIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	4395	84,6
3000	4600	88,5
4000	4795	92,3

### RA90 INDIRECT

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	3395	88,5
3000	3475	90,6
4000	3555	92,7

CODE	DESCRIPTION
QBOP2+PROYID2790200000	PROFILE 2+1 PRO suspended T: 3000W L: 90,4W 2700K Ra90/95 D3960lm I1360lm IP20 2000mm white
QBOP2+PROYID3090200000	PROFILE 2+1 PRO suspended T: 3000W L: 90,4W 3000K Ra90/95 D3960lm I1360lm IP20 2000mm white
QBOP2+PROYID4090200000	PROFILE 2+1 PRO suspended T: 3000W L: 90,4W 4000K Ra90/95 D3960lm I1360lm IP20 2000mm white
QBOP2+PROYID2790200001	PROFILE 2+1 PRO suspended T: 3000W L: 90,4W 2700K Ra90/95 D3960lm I1360lm IP20 2000mm aluminum
QBOP2+PROYID3090200001	PROFILE 2+1 PRO suspended T: 3000W L: 90,4W 3000K Ra90/95 D3960lm I1360lm IP20 2000mm aluminum
QBOP2+PROYID4090200001	PROFILE 2+1 PRO suspended T: 3000W L: 90,4W 4000K Ra90/95 D3960lm I1360lm IP20 2000mm aluminum
QBOP2+PROYID2790200009	PROFILE 2+1 PRO suspended T: 3000W L: 90,4W 2700K Ra90/95 D3960lm I1360lm IP20 2000mm black
QBOP2+PROYID3090200009	PROFILE 2+1 PRO suspended T: 3000W L: 90,4W 3000K Ra90/95 D3960lm I1360lm IP20 2000mm black
QBOP2+PROYID4090200009	PROFILE 2+1 PRO suspended T: 3000W L: 90,4W 4000K Ra90/95 D3960lm I1360lm IP20 2000mm black