

## ayer

|                       |                                |
|-----------------------|--------------------------------|
| RANGE                 | QBO AYER                       |
| REF.                  | AYP                            |
| TYPE                  | PROJECTOR                      |
| DIMENSIONS            | Ø75 x 101 mm                   |
| MATERIAL              | ALUMINIUM                      |
| LIGHTING DISTRIBUTION | DIRECT                         |
| FINISH                | WHITE / BLACK                  |
| RING FINISH           | WHITE / BLACK / BRASS / SILVER |
| VOLTAGE               | 220 - 240 V                    |
| FREQUENCY             | 50 / 60 Hz                     |
| FEEDER KIT            | INCLUDED (500mA)               |
| POWER                 | 18,3 W                         |
| IP RATING             | IP20                           |
| LIGHTING DISTRIBUTION | DIRECT                         |
| COLOR TEMPERATURE     | 2700K / 3000K / 4000K          |
| CRI                   | 80 / 90                        |
| LIGHTING FLUX         | from 1992 lm to 2641 lm        |
| BEAM ANGLE            | 10° / 24° / 36°                |




| CODE | DESCRIPTION      |
|------|------------------|
| AYP- | AYER projector - |


\* Driver included  
Antiglare honeycomb included

### reference builder

| TYPE               | INSTALL        | POWER         | C. TEMP       | BEAM        | CRI            | FINISH        | RING                           | DIMING        |
|--------------------|----------------|---------------|---------------|-------------|----------------|---------------|--------------------------------|---------------|
|                    | -<br>(track)   |               | 27<br>(2700K) | 10<br>(10°) |                |               | 00<br>(white)                  |               |
| AYP<br>(projector) | T<br>(trim)    | 18<br>(12,3W) | 30<br>(3000K) | 24<br>(24°) | 80<br>(CRI>80) | 00<br>(white) | 01<br>(silver)                 | -<br>(on/off) |
|                    | R<br>(rosette) |               | 40<br>(4000K) | 36<br>(36°) | 90<br>(CRI>90) | 09<br>(black) | 02<br>(brass)<br>09<br>(black) | D<br>(DALI)   |

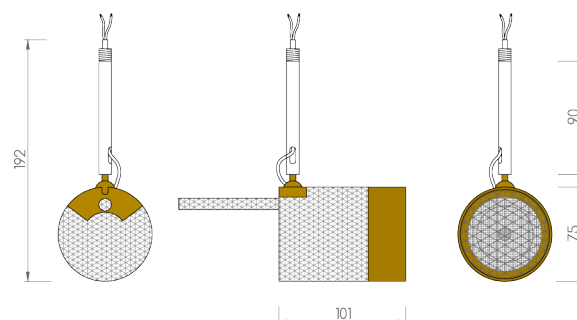

Order example:  
AYP - 18 30 10 90 00 00 D  
AYER projector track 18,3W 3000K 10° CRI90 white finish & white ring DALI

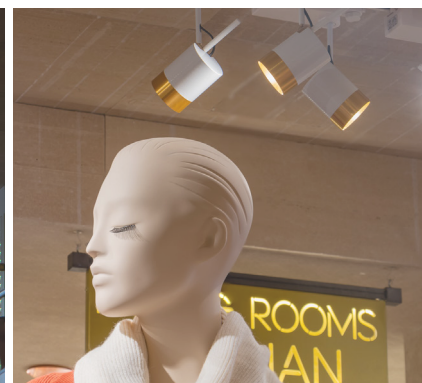

## ayer

### INSTALLATION

