

Data sheet

www.qboiluminacion.com

qbo

ayer mini

RANGE	QBO AYER MINI
REF.	AYMN
TYPE	PROJECTOR
DIMENSIONS	Ø55 x 85 mm
MATERIAL	ALUMINIUM
LIGHTING DISTRIBUTION	DIRECT
FINISH	WHITE / BLACK
RING FINISH	WHITE / BLACK / BRASS / SILVER
VOLTAGE	220 - 240 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	INCLUDED (350mA)
POWER	12,7 W
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT
COLOR TEMPERATURE	2700K / 3000K / 4000K
CRI	80 / 90
LIGHTING FLUX	from 1457 lm to 1928 lm
BEAM ANGLE	10° / 24° / 36°



CODE	DESCRIPTION
AYMN-	AYER MINI projector -

* Driver included

reference builder

TYPE	INSTALL	POWER	C. TEMP	BEAM	CRI	FINISH	RING	DIMING
AYMN (projector)	- (track)						00 (white)	
	T (trim)		27 (2700K)	10 (10°)	80 (CRI>80)	00 (white)	01 (silver)	- (on/off)
	R (rosette)*	12 (12,7W)	30 (3000K)	24 (24°)	90 (CRI>90)	09 (black)	02 (brass)	D (DALI)
	FC (fc prof.)*		40 (4000K)	36 (36°)			09 (black)	
	C (coin)*							
	CS (coin S)*							

* R: On/off driver inside rosette. Dali driver must be placed remote.

FC: compatible with QBO FC profile


C: compatible with QBO COIN downlight (frame as standard, trimless version available)

CS: compatible with QBO COIN S downlight (frame as standard, trimless version available)

Order example:

AYMN FC 12 30 36 90 00 01 -

AYER MINI projector FC 12,7W 3000K 36° CRI90 white finish & silver ring on/off

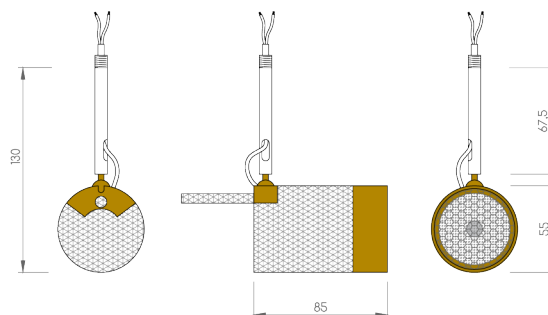

ayer mini acc

CODE	DESCRIPTION
AYMINPANEL-	AYER MINI antiglare honey comb -

INSTALLATION

