


CANDLE

RANGE	QBO CANDLE
REF.	CND-
TYPE	SURFACE LUMINAIRE
DIMENSIONS	697 x 160 mm
MATERIAL	ALUMINUM
FINISH	BLACK COPPER BRASS
VOLTAGE	200 - 240 V
FREQUENCY	50 / 60 Hz
FEEDER KIT	120 mA (INCLUDED)
DIMMABLE	YES (TRIAC)
POWER	6 W
POWER FACTOR	0,9
SERVICE LIFE	> 40.000 HRS
WARRANTY	5 YEARS
INSULATION CLASS	CLASS II
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT
COLOR TEMPERATURE	2700 / 3000 K
CRI	90
MACADAM ELLIPSE	3
LIGHTING FLUX	307lm - 432lm / 321lm - 442lm / 342lm - 460lm
LUMINOUS EFFICACY	51,2lm/W - 72lm/W / 53,5lm/W - 73,7lm/W / 57lm/W - 76,7lm/W
OPENING DEGREES	18°

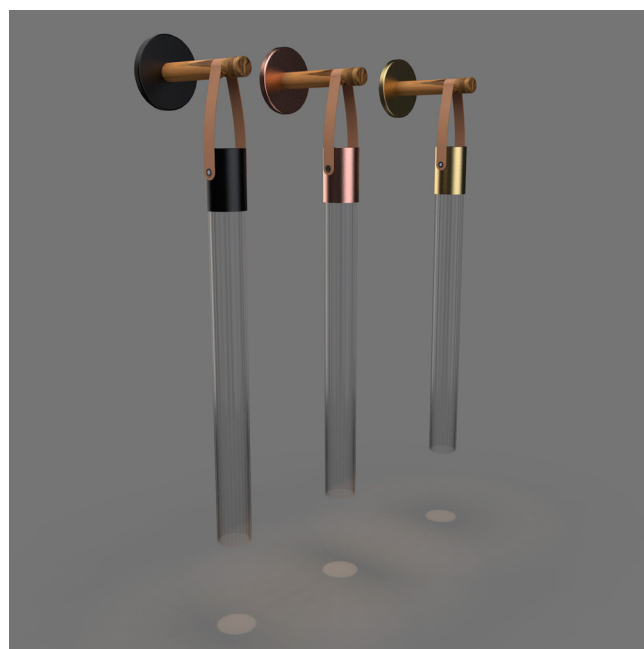

CODE	DESCRIPTION
CND5630189022L TRIAC	CANDLE luminaire surface 6W 3000K 18° CRI90 copper finish TRIAC

* DRIVER INCLUDED

reference builder

TYPE	INSTALL	POWER	C. TEMP	BEAM	CRI	FINISH	DIMMING
CND (luminaire)	S (surface)	6 (6W)	27 (2700K) 30 (3000K)	18 (18°)	90 (CRI>90)	22L (copper) 02 (brass) 09L (black)	- (on/off) TRIAC (TRIAC)

Order example:

CND S 6 30 18 90 22L TRIAC

CANDLE luminaire surface 6W 3000K 18° CRI90 copper finish TRIAC

