

## coin

RANGE	COIN
REF.	COINDE-
TYPE	RECESSED
WEIGHT	0,465 kg
MATERIAL	ALUMINUM/PLASTIC
FINISH	WHITE
VOLTAGE	30 V - 40 V
FEEDER KIT	(NOT INCLUDED)
DIMMABLE	YES
SERVICE LIFE	50.000h (L70)
OPERATING TEMPERATURE	-20 a 40 °C
LIGHTING DISTRIBUTION	DIRECT
COLOR TEMPERATURE	3000 K / 4000 K
CRI	>90
MACADAM ELLIPSE	3



### reference builder

TYPE	INSTALLATION	EXTERIOR BODY	LIGHTING	POWER	C. TEMP	CRI	BEAM	IP	BODY COLOR	DIMMING	
COIN (downlight)	F (fixed)	F (frame)	COB (cob)	for LM 88 (8,8W) 95 (9,5W)	27 (2700K)	90 (CRI>90)	for COB 10 (10°)	-	00 (white)	-	
			LM (led module)				15 (15°)				-
			GU10 (gu10 led lamp)				24 (24°)				
	O (orientable)	T (trimless)	Rosette projectors **	122 (12,2W)	30 (3000K)	36 (36°)	for LM	(IP20)	09 (black)	(on/off)	
			+AYMC (ayer micro)	182 (18,2W)	40 (4000K)	12 (12°)	55 (IP55)	02 (brass)	D (DIM)		
			+AYMN (ayer mini)			24 (24°)					
		+LTLEDS (ltsuspended)				for GU10					
							36 (36°)				
							60 (60°)				
							120 (120°)				

Other color temperatures available under request

\*Compatible con lámparas GU10, GUS.3, módulo LED y COB  
Compatible with GU10, GUS.3 lamps, LED module and COB

Order example:

COIN O T 09 COB 162 30 90 36 09 D 55

Coin orientable exterior body trimless black finish COB 16,2W 3000K CRI90 36° black interior DIM IP55

#### Reference Builders

AYMN page 150  
AYMC page 153  
LTLEDS page 170

\*\*En caso de seleccionar un proyector, la referencia continúa con el "Reference Builder" del proyector correspondiente

\*\*if you select a projector, the reference continues with the "Reference Builder" of the corresponding projector.


Ejemplo: COIN F T 00 AYMC R 7 30 30 80 00L 02 D

Coin fijo acabado blanco sin marco con un Ayer micro rosette 7W 3000k 30° CRI 80 acabado blanco & anillo acabado latón Dali.

Example: COIN F T 00 AYMC R 7 30 30 80 00L 02 D

Coin fixed white finish frameless with an Ayer micro rosette 7W 3000k 30° CRI 80 white finish & brass finish Dali ring.

-COIN Fix with LED module:

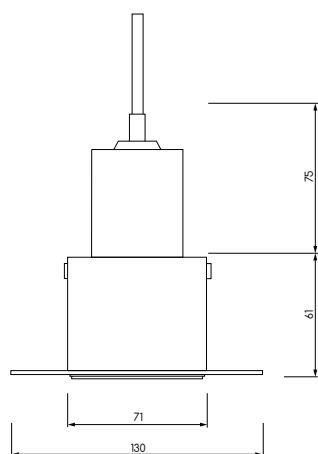

-COIN Fix with COB:

