


flexy^R

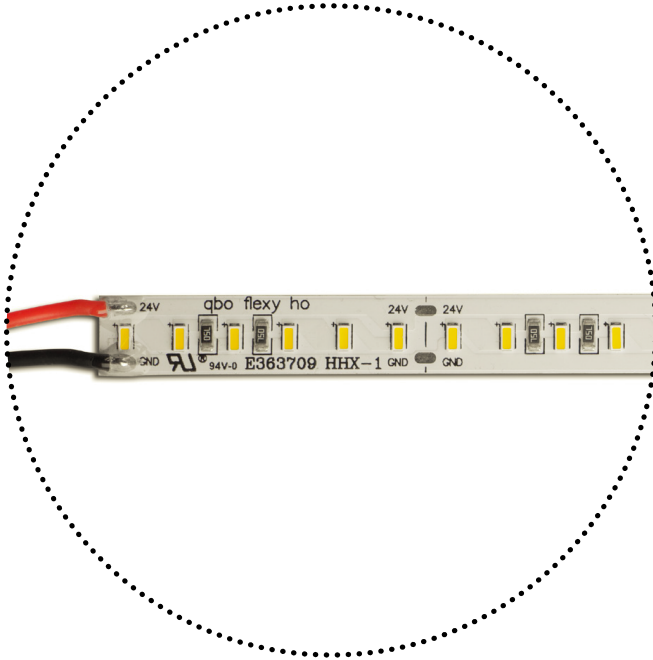

RANGE	QBO FLEXY R
REF.	13250-
TYPE	LEDSTRIP
DIMENSIONS	3 x (10 x 1000) mm
CUT UNIT	40 mm
MAXIMUM RUN LENGTH	3000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	(ø=0,5 mm) 1500 mm
GAP BETWEEN LEDS	5 mm
WEIGHT	0,160 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	25 W
SERVICE LIFE	> - HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	80
MACADAM ELLIPSE	-
LPM	150 lpm
OPENING DEGREES	- °
WARRANTY	5 YEARS

*NEEDS DISSIPATION

**SUPPLIED IN THREE SECTIONS OF 1000mm LENGTH

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	2490	99,6
3000	2540	101,6
4000	2600	104



ODE	DESCRIPTION
1325027180	LEDSTRIP FLEXY Rigid 25W/m 2700K 3x1m Ra80 2490lm/m 150leds/m IP20 24V
1325030180	LEDSTRIP FLEXY Rigid 25W/m 3000K 3x1m Ra80 2540lm/m 150leds/m IP20 24V
1325040180	LEDSTRIP FLEXY Rigid 25W/m 4000K 3x1m Ra80 2600lm/m 150leds/m IP20 24V

