


## flexy CCT

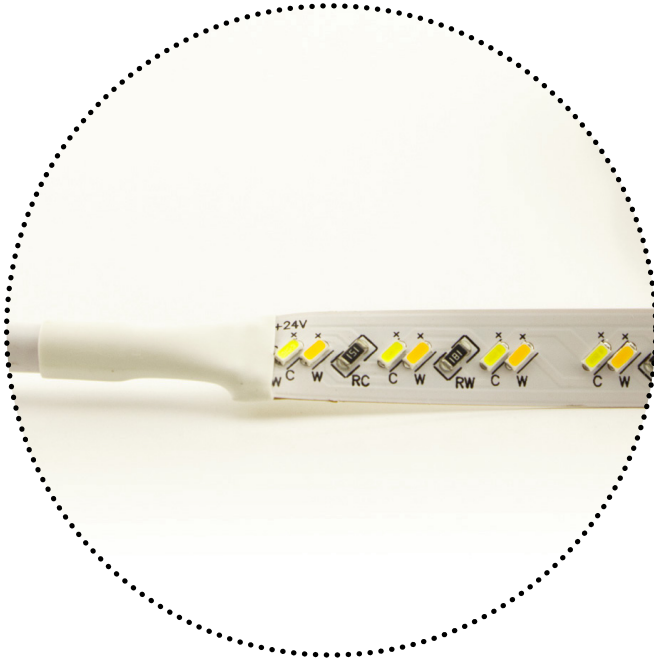


RANGE	QBO FLEXY CCT
REF.	15150-
TYPE	LEDSTRIP
DIMENSIONS	10 x 5000 mm
CUT UNIT	62 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	5000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	(ø 0,5 mm) 3000 mm
WEIGHT	- Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	15 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	80
MACADAM ELLIPSE	2
LPM	96 lpm
OPENING DEGREES	140 °
WARRANTY	5 YEARS

\*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700-6500	-1250	-83,3



CODE	DESCRIPTION
15150CCT580	LEDSTRIP FLEXY CCT 15W/m 2700-6500K 1m Ro8 1250lm/m 96leds/m IP20 24V



## flexy RGB CCT

CODE	DESCRIPTION
061447	CCT REMOTE CONTROLLER

