


flexy ECO HO IP

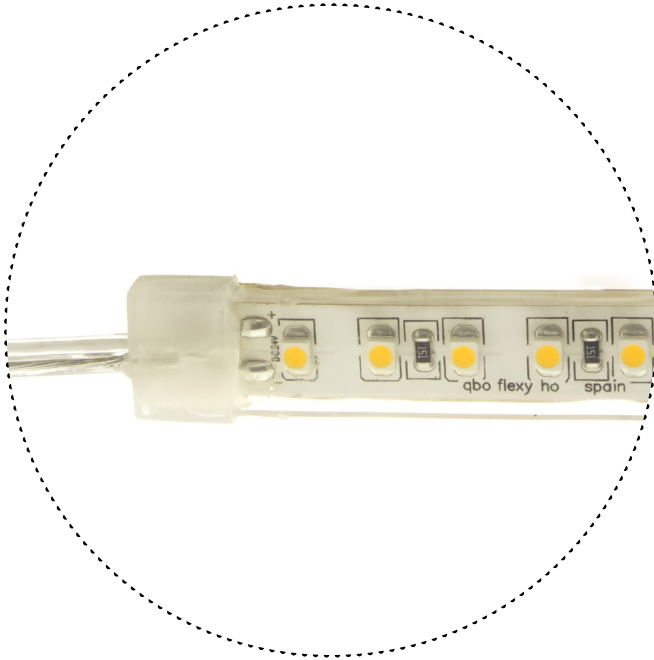

RANGE	QBO FLEXY ECO HO
REF.	11096-
TYPE	LEDSTRIP
DIMENSIONS	13 x 5000 mm
CUT UNIT	50 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	(ø 0,5 mm) 3000 mm
GAP BETWEEN LEDS	5,5 mm
WEIGHT	0,285 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	9,6 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP67
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	80
MACADAM ELLIPSE	5
LPM	120 lpm
OPENING DEGREES	120°
WARRANTY	3 YEARS

*DOES NOT NEED DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	740	77,1
2700	780	81,3
3000	785	81,8
4000	810	84,4
6000	800	83,3



CODE	DESCRIPTION
110962258067	LEDSTRIP FLEXY EcoHO 9,6W/m 2200K 5m RA80 740lm/m 120leds/m IP67 24V
110962758067	LEDSTRIP FLEXY EcoHO 9,6W/m 2700K 5m RA80 780lm/m 120leds/m IP67 24V
110963058067	LEDSTRIP FLEXY EcoHO 9,6W/m 3000K 5m RA80 785lm/m 120leds/m IP67 24V
110964058067	LEDSTRIP FLEXY EcoHO 9,6W/m 4000K 5m RA80 810lm/m 120leds/m IP67 24V
110966558067	LEDSTRIP FLEXY EcoHO 9,6W/m 6500K 5m RA80 800lm/m 120leds/m IP67 24V

