


flexy HO ++

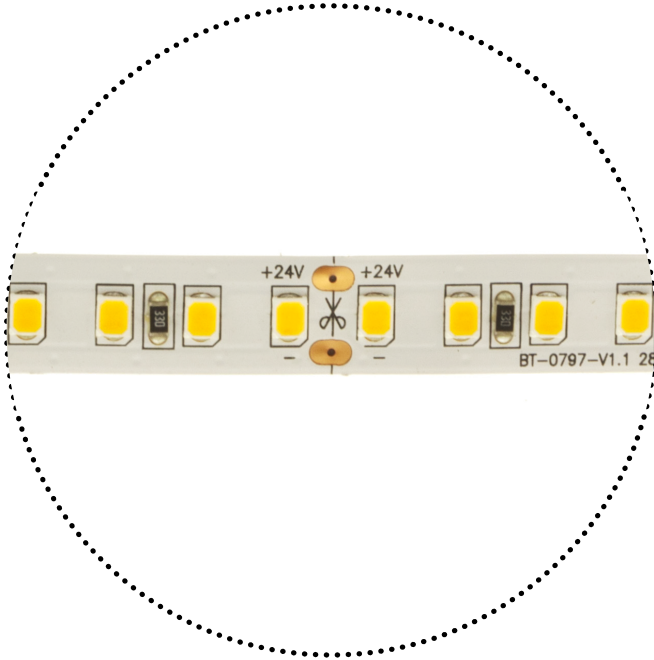

RANGE	QBO FLEXY HO++
REF.	01250-
TYPE	LEDSTRIP
DIMENSIONS	10 x 5000 mm
CUT UNIT	50 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	3000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	($\phi=0,5$ mm) 1500 mm
GAP BETWEEN LEDS	4,3 mm
WEIGHT	0,170 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	25 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	98
MACADAM ELLIPSE	5
LPM	140 lpm
OPENING DEGREES	140 °
WARRANTY	5 YEARS

*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2700	1900	76
3000	2000	80
3125	2050	82
4000	2100	84



ODE	DESCRIPTION
0125027598	LEDSTRIP FLEXY HO++ 25W/m 2700K 5m Ra98 1900lm/m 140 leds/m IP20 24V
0125030598	LEDSTRIP FLEXY HO++ 25W/m 3000K 5m Ra98 2000lm/m 140 leds/m IP20 24V
0125031598	LEDSTRIP FLEXY HO++ 25W/m 3125K 5m Ra98 2050lm/m 140 leds/m IP20 24V
0125040598	LEDSTRIP FLEXY HO++ 25W/m 4000K 5m Ra98 2100lm/m 140 leds/m IP20 24V

