


## flexy MEDIUM

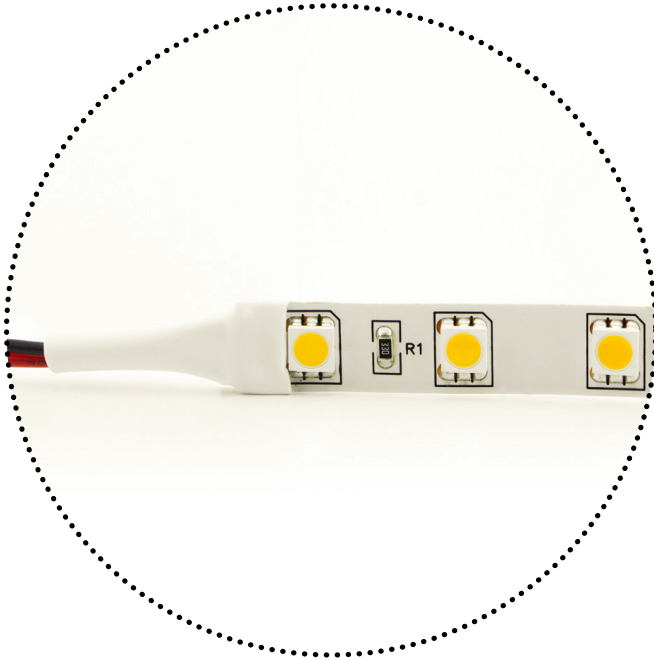

RANGE	QBO FLEXY MEDIUM
REF.	04144-
TYPE	LEDSTRIP
DIMENSIONS	10 x 5000 mm
CUT UNIT	100 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	( $\phi=0,5$ mm) 3000 mm
GAP BETWEEN LEDS	12 mm
WEIGHT	0,135 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	14,4 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	80
MACADAM ELLIPSE	2
LPM	60 lpm
OPENING DEGREES	120 °
WARRANTY	5 YEARS

\*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	1080	75
2700	1130	78,5
3000	1180	81,9
4000	1210	84
6500	1200	83,3



CODE	DESCRIPTION
0414422580	LEDSTRIP FLEXY Medium 14,4W/m 2200K 5m Ra80 1080lm/m 60leds/m IP20 24V
0414427580	LEDSTRIP FLEXY Medium 14,4W/m 2700K 5m Ra80 1130lm/m 60leds/m IP20 24V
0414430580	LEDSTRIP FLEXY Medium 14,4W/m 3000K 5m Ra80 1180lm/m 60leds/m IP20 24V
0414440580	LEDSTRIP FLEXY Medium 14,4W/m 4000K 5m Ra80 1210lm/m 60leds/m IP20 24V
0414465580	LEDSTRIP FLEXY Medium 14,4W/m 6500K 5m Ra80 1200lm/m 60leds/m IP20 24V

