


## flexy MEDIUM IP

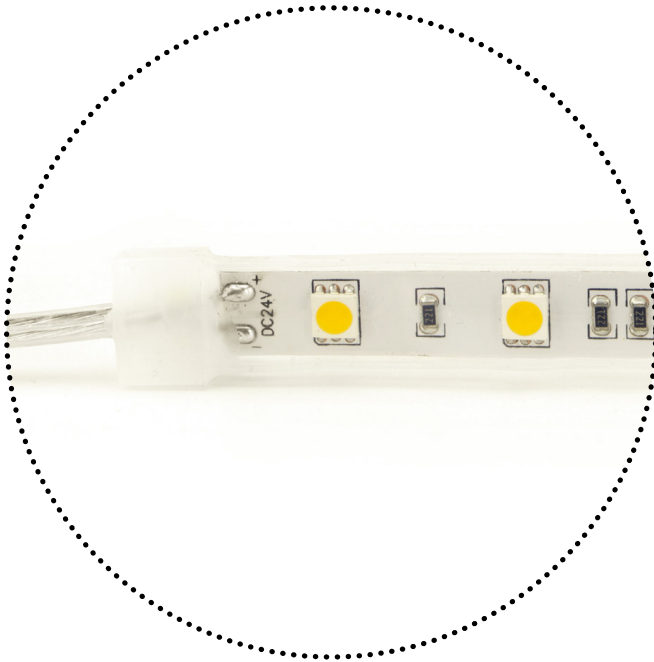

RANGE	QBO FLEXY MEDIUM
REF.	04144-
TYPE	LEDSTRIP
DIMENSIONS	13 x 5000 mm
CUT UNIT	100 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	( $\phi=0,5$ mm) 3000 mm
GAP BETWEEN LEDS	12 mm
WEIGHT	0,525 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	14,4 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP68
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	80
MACADAM ELLIPSE	5
LPM	60 lpm
OPENING DEGREES	120 °
WARRANTY	5 YEARS

\*DOES NOT NEED DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	1020	70,8
2700	1070	74,3
3000	1120	77,8
4000	1150	79,9
6500	1140	79,2



CODE	DESCRIPTION
041442258068	LEDSTRIP FLEXY Medium 14,4W/m 2200K 5m Ra80 1020lm/m 60leds/m IP68 24V
041442758068	LEDSTRIP FLEXY Medium 14,4W/m 2700K 5m Ra80 1070lm/m 60leds/m IP68 24V
041443058068	LEDSTRIP FLEXY Medium 14,4W/m 3000K 5m Ra80 1120lm/m 60leds/m IP68 24V
041444058068	LEDSTRIP FLEXY Medium 14,4W/m 4000K 5m Ra80 1150lm/m 60leds/m IP68 24V
041446558068	LEDSTRIP FLEXY Medium 14,4W/m 6500K 5m Ra80 1040lm/m 60leds/m IP68 24V

