


flexy MEDIUM IP

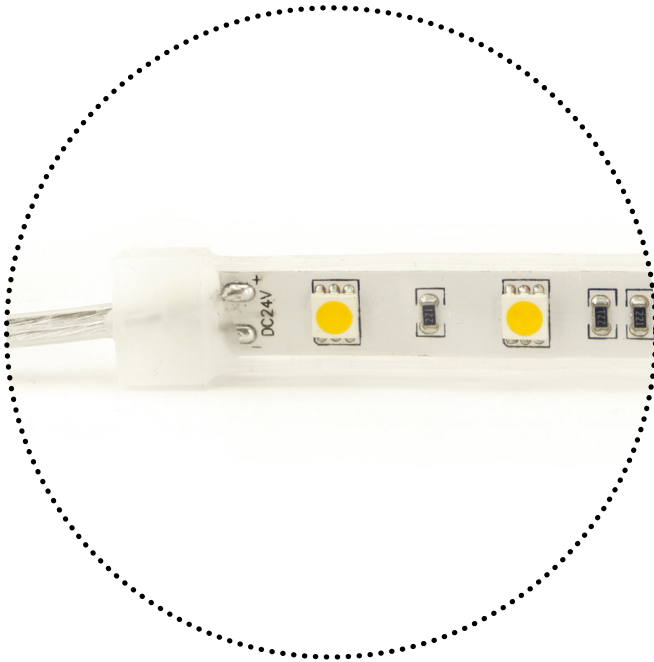

RANGE	QBO FLEXY MEDIUM
REF.	04144-
TYPE	LEDSTRIP
DIMENSIONS	13 x 5000 mm
CUT UNIT	100 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	($\phi=0,5$ mm) 3000 mm
GAP BETWEEN LEDS	12 mm
WEIGHT	0,290 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	14,4 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP67
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	90
MACADAM ELLIPSE	5
LPM	60 lpm
OPENING DEGREES	120 °
WARRANTY	5 YEARS

*DOES NOT NEED DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	945	65,6
2700	990	68,8
3000	1030	71,5
4000	1060	73,6
6500	1050	72,9



CODE	DESCRIPTION
041442259067	LEDSTRIP FLEXY Medium 14,4W/m 2200K 5m Ra90 945lm/m 60leds/m IP67 24V
041442759067	LEDSTRIP FLEXY Medium 14,4W/m 2700K 5m Ra90 990lm/m 60leds/m IP67 24V
041443059067	LEDSTRIP FLEXY Medium 14,4W/m 3000K 5m Ra90 1030lm/m 60leds/m IP67 24V
041444059067	LEDSTRIP FLEXY Medium 14,4W/m 4000K 5m Ra90 1060lm/m 60leds/m IP67 24V
041446559067	LEDSTRIP FLEXY Medium 14,4W/m 6500K 5m Ra90 1050lm/m 60leds/m IP67 24V

