

square neon^{top diy}





RANGE	SQUARE NEON
REF.	NFS-
TYPE	LED STRIP
DIMENSIONS ⁽¹⁾	16x17x10.000mm
CUT UNIT	55,56 mm
MINIMUM BENDING DIAMETRE	300 mm
MAXIMUM RUN LENGTH	10.000mm
WEIGHT	0,49 kg /m
VOLTAGE	24 V
DIMMABLE	YES
POWER	13 W/m
SERVICE LIFE ⁽²⁾	14.600 h
IP RATING	IP68/IP40
IK RATING ⁽³⁾	IK08
OPERATING TEMPERATURE	-20 to 45 °C
COLOR TEMPERATURE	2500K / 3000K / 4000K
CRI	85
MACADAM ELLIPSE	5
LIGHTING FLUX	510 lm/m
LUMINOUS EFFICACY	39 lm/W
LPM	108 LEDS/m
OPENING DEGREES	160°

⁽¹⁾ STANDARD LENGTH 10 METERS ROLL
⁽²⁾ DON'T CONTINUOUSLY OPERATE OVER 8h PER DAY
⁽³⁾ IN CASE COSTUMER MAKE CUTS ITSELF, ONLY CORRECT USE OF THE SILICONE AND END CAPS RECOMEDEN CAN GUARANTEE LED STRIP WATERPROOF



CODE	DESCRIPTION
NFSI3W24VTOP25	SQUARE NEON LED top 13W/M 2500K 1m Ra85 510lm/m 108leds/m IP68 24V
NFSI3W24VTOP30	SQUARE NEON LED top 13W/M 3000K 1m Ra85 510lm/m 108leds/m IP68 24V
NFSI3W24VTOP40	SQUARE NEON LED top 13W/M 4000K 1m Ra85 510lm/m 108leds/m IP68 24V
02T013003	SQUARE NEON LED top conector 3m cable
02T013004	SQUARE NEON LED top end cap

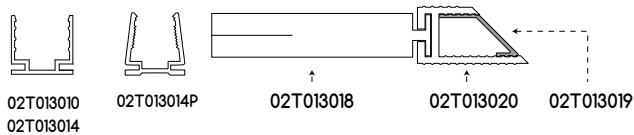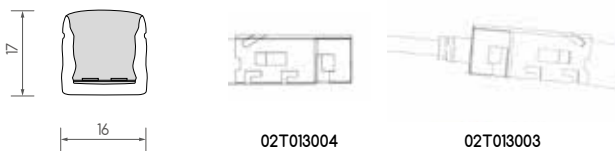

square neon^{acc}

CODE	DESCRIPTION
02T013010	SQUARE NEON LED top mounting channel 5 cm.
02T013014	SQUARE NEON LED top mounting channel 100 cm.
02T013014P	SQUARE NEON LED top plastic mounting channel 100 cm.
02T013018	SQUARE NEON LED top 45° mounting Channel 100 cm.
02T013019	SQUARE NEON LED top 45° aluminium position holder 100 cm.
02T013013	SQUARE NEON LED Waterproof grease with small brush
02T013005I	SQUARE NEON LED Top/side añadido cable/metro