

## square neon<sup>top injected</sup>




RANGE	SQUARE NEON
REF.	NFS-
TYPE	LED STRIP
DIMENSIONS <sup>(1)</sup>	16x17x7.000mm
CUT UNIT	83.33 mm
MINIMUM BENDING DIAMETRE	300 mm
MAXIMUM RUN LENGTH	7.000mm
WEIGHT	0,33 kg /m
VOLTAGE	24 V
DIMMABLE	YES
POWER	12 W/m
SERVICE LIFE <sup>(2)</sup>	14.600 h
IP RATING	IP68
IK RATING	IK08
OPERATING TEMPERATURE	-20 TO 45 °C
COLOR TEMPERATURE	RGB
MACADAM ELLIPSE	5
LPM	84 LEDS/m
OPENING DEGREES	160°

<sup>(1)</sup> SHORTER LENGTHS AVAILABLE UNDER REQUEST  
<sup>(2)</sup> DON'T CONTINUOUSLY OPERATE OVER 8h PER DAY



CODE	DESCRIPTION
NFSTOPRGB13	SQUARE NEON LED top 12W/M RGB 1m 84leds/m IP68 24V injected
02T013003I	SQUARE NEON LED top conector 3m cable injected
02T013004I	SQUARE NEON LED top end cap injected

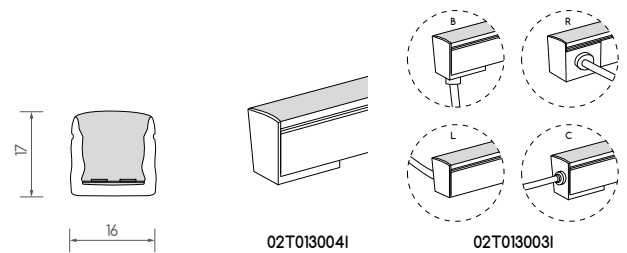

## square neon<sup>acc</sup>

CODE	DESCRIPTION
02T013010	SQUARE NEON LED top mounting channel 5 cm.
02T013014	SQUARE NEON LED top mounting channel 100 cm.
02T013014P	SQUARE NEON LED top plastic mounting channel 100 cm.
02T013018	SQUARE NEON LED top 45° mounting Channel 100 cm.
02T013019	SQUARE NEON LED top 45° aluminium position holder 100 cm.
02T013020	SQUARE NEON LED top 45° aluminium fixing holder

