



profile 16x15




PROFILE (SIDE VIEW)

PROFILE

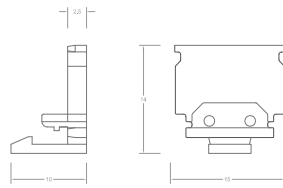


IN CAP (transparent)

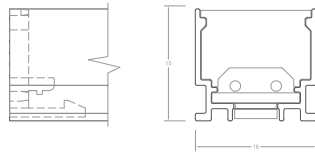


PROFILE + CAP (SIDE VIEW)


PROFILE + END CAP

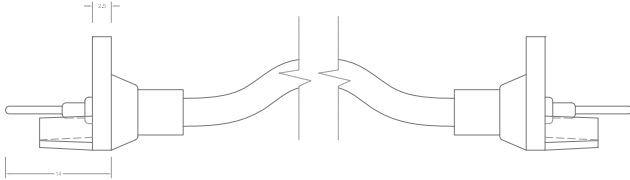


SINGLE / DOUBLE CONNECTOR



FIXING CLIP 0°



FIXING CLIP 15°



FIXING CLIP 45°

RANGE	PROFILE 16X15
REF.	QBOP16x15-
TYPE	SURFACE
DIMENSIONS	16 x 15 x L mm
MAXIMUM RUN LENGTH	5000 mm
MATERIAL	ALUMINIUM
ALLOY	6063
FINISH	ALUMINIUM
VOLTAGE	24 V
FEEDER KIT	NOT INCLUDED
POWER	18 W/m
PLUG-IN SYSTEM	BIPOLAR
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT
COLOR TEMPERATURE	3000K
CRI	80
LIGHTING FLUX	2300 lm/m
LUMINOUS EFFICACY	128 lm/W
MOUNTING SYSTEM	FIXING CLIP
DIFFUSER	INCLUDED

*Bipolar lineal luminaire. It carries an electronic that allows to reverse the polarity in case of necessity. Easy plug-and-play without worrying about which is the positive or the negative pole.



CODE	DESCRIPTION
QBOP16X15.1000 ⁽¹⁾	Profile 16x15 surface 18W 3000K 1m Ra80 2300lm IP20
QBOP16X15.2000 ⁽¹⁾	Profile 16x15 surface 36W 3000K 2m Ra80 4600lm IP20
QBOP16X15SC	Profile 16x15 single connector 1000mm
QBOP16X15DC	Profile 16x15 double connector 1000mm
QBOP16X15U	Profile 16x15 linear union (1 unit)
QBOP16X15F0	Profile 16x15 fixing clip 0° (4 units)
QBOP16X15F15	Profile 16x15 fixing clip 15° (4 units)
QBOP16X15F40	Profile 16x15 fixing clip 40° (4 units)

⁽¹⁾ END CAPS INCLUDED IN PROFILE KIT