


varioled

RANGE	VARIOLED
REF.	VARLED-
TYPE	RECESSED DOWNLIGHT
DIMENSIONS	170 x 170 x 122 mm
FREE HEIGHT FOR INSTALLATION	142 mm
MATERIAL	ALUMINIUM
FINISH	WHITE / BLACK
CUT DIAMETER	151 mm
LIGHT SOURCE	LED COB
VOLTAGE	220 - 240 V
FREQUENCY	50 / 60 Hz
POWER	24,1W
FEEDER KIT	700MA
SERVICE LIFE	50.000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT
COLOR TEMPERATURE	2700 / 3000 / 4000 K
CRI	80 / 90
LIGHTING FLUX	3601lm, 3694lm, 3851lm / 3053lm, 3128lm, 3355lm

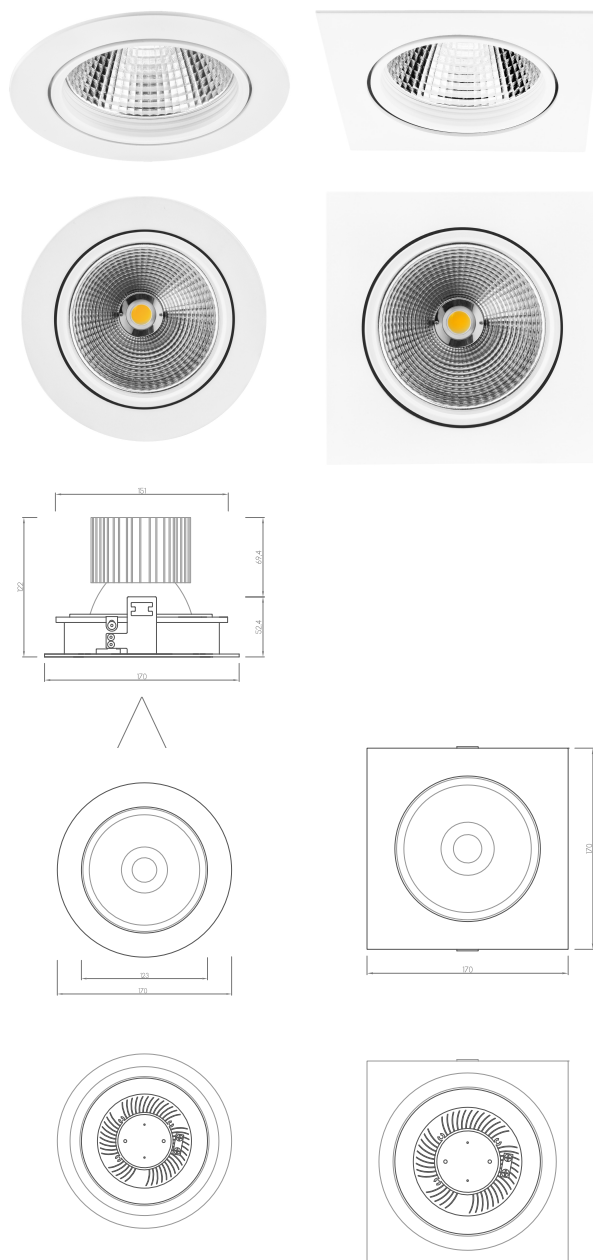

CE RoHS EAC

CODE	DESCRIPTION
VARLED-	VARIOLED -

reference builder

TYPE	GEOM.	POWER	C. TEMP	BEAM ANG	CRI	IP	FINISH	DIMMING
VARLED (recessed)	S (Square)	24,1W (700mA)	27 (2700K)	10°	80 (CRI>80)	20 (IP20)	00 (white)	- (on/off)
	R (Round)		30 (3000K)	24°	90 (CRI>90)		09 (black)	D (DIM)**
	40 (4000K)							

* Driver included

Order example:

VARLED S 241 27 24 90 20 09 -

VARIOLED SQUARE orientable downlight 24,1W 2700K 24° CRI/90 IP20 black finish on/off

