




qbo **2+1** wall

2+1 wall

qbo

Perfil de aluminio extruido con acabado anodizado de 20 micras para montaje en pared.
Difusor plano disponible para su inserción tanto en la parte superior como en la inferior del perfil, para permitir la emisión de luz directa e indirecta. El equipo de alimentación puede alojarse en el interior del perfil o instalarse de forma remota. El perfil cuenta con tapas finales y puede montarse en forma de continua mediante uniones lineales y angulares. Dimensiones: 80x30x3000mm.

Extruded aluminum profile with 20 micron anodized finish for wall mounting.
Flat diffuser available for insertion on both the top and bottom of the top and bottom of the profile to allow direct and indirect light emission. The power supply unit can be housed inside the profile or installed remotely. The profile is equipped with end caps and can be assembled in a continuous in continuous form by means of linear and angular joints. Dimensions: 80x30x3000mm.

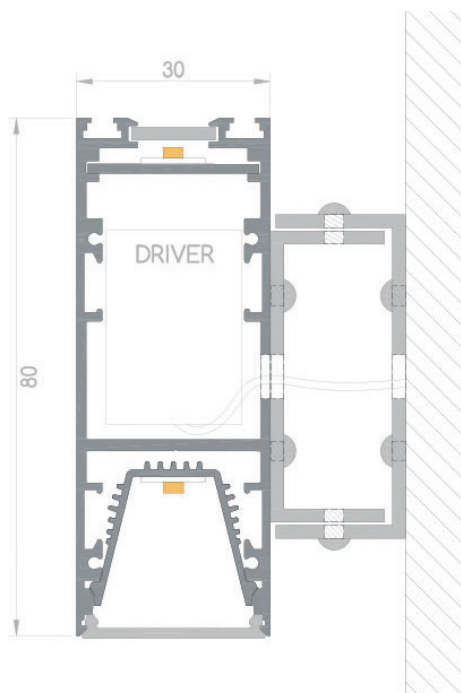

reference builder

TYPE	EMISSION	C. TEMP	CRI	FINISH	DIMMING	LENGTH
2+1W (wall lamp)	U (light up)	27 (2700K)	90 (CRI>90)	00 (white)	- (on/off)	.51 (510mm)
	D (light down)	30 (3000K)		09 (black)		.76 (760mm)
	UD (light up & down)	40 (4000K)		19 (bronze)	D (DALI)	.101 (1010mm)

Order example:
2+1W UD 40 90 19 - .76
2+1 WALL LAMP light up & down 4000K CRI90 bronze finish on/off 760 mm.

