


qbo h3

h3

Perfil de aluminio extruido con acabado anodizado de 20 micras, blanco o negro para montaje en superficie o suspendido. Equipado con difusor en policarbonato mate. Las tiras de LED van instaladas en una bandeja que se desliza en el interior del perfil cuyo ancho permite alojar hasta tres tiras de LED de 25W/m simultáneamente. El perfil cuenta con tapas finales y puede montarse en forma de continua mediante uniones lineales y angulares. Dimensiones: 83x50x3000mm.




20 micron anodized extruded aluminum profile, white or black finish with the possibility to be surface mounted or suspended. Equipped with a frosted polycarbonate diffuser, end caps and linear unions that allow to add more pieces to make a longer luminaire. The LED strips are placed on a plate that slides into the profile whose width allows to place up to three 25W/m LED strips. The profile can be closed with end caps and can be arranged continuously using linear or angular unions. Dimensions: 83x50x3000mm.

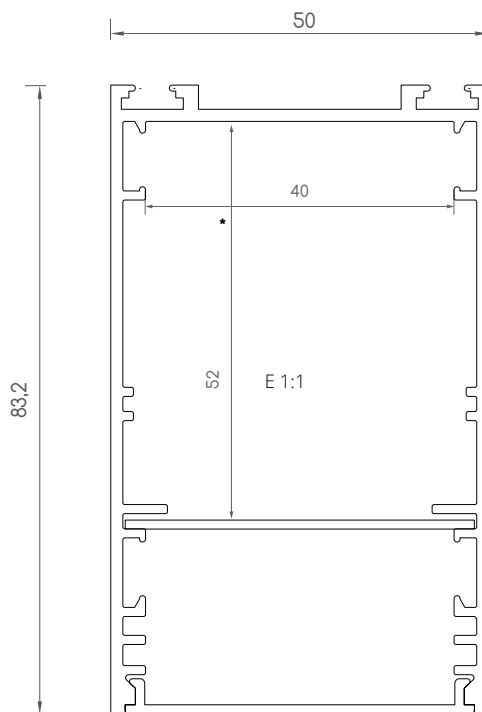

* Ver compatibilidad en el alojamiento de equipos en DRIVERS.
See drivers housing compatibility in DRIVERS.



Diferentes acabados y opciones de protección IP disponibles bajo pedido
Other finishes and IP ratings available on request

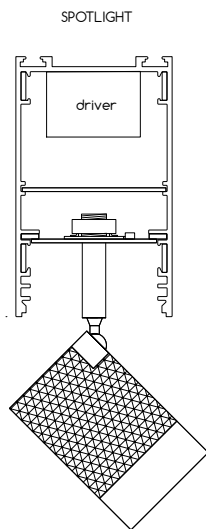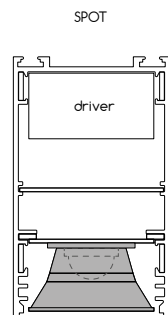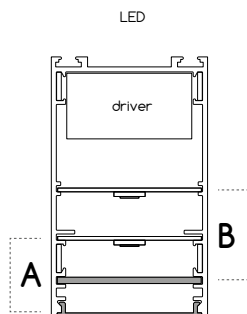


COD.	DESC.
QBOPH300	PROFILE H3 3000MM WHITE
QBOPH301	PROFILE H3 3000MM ALUMINIUM
QBOPH309	PROFILE H3 3000MM BLACK


COD.	DESC.
QBOPH3C00	PROFILE H3 END CAP WHITE (2 UNITS)
QBOPH3C01	PROFILE H3 END CAP ALUMINIUM (2 UNITS)
QBOPH3C09	PROFILE H3 END CAP BLACK (2 UNITS)

COD.	DESC.
QBOP50DF	PROFILE 50 DIFFUSER FROSTED 3000MM
QBOPH3DP	PROFILE H3 DIFFUSER PRISMATIC 2050MM

COD.	DESC.
QBOH3P.1000	PROFILE H3 LINEAR PLATE 1000MM
QBOH3P.2000	PROFILE H3 LINEAR PLATE 2000MM

COD.	DESC.
QBOP04UL	PROFILE 04 9X1MM LINEAR UNION (4 UNITS)
QBOP04UAE	PROFILE 04 9X1MM LINEAR ANGULAR UNION (4 UNITS)

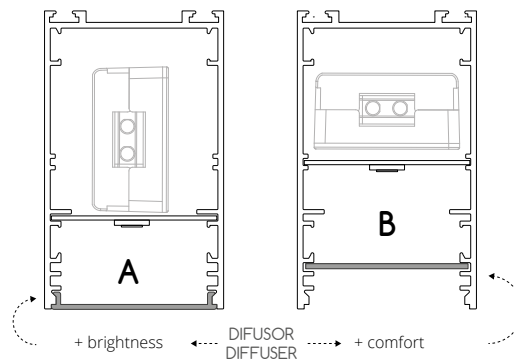


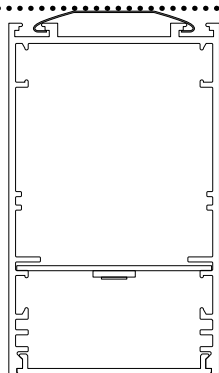

COD.	DESC.
QBOPH3F	PROFILE H3 FIXING CLIP (1 UNIT)


COD.	DESC.
QBOKITSUSPY	PROFILE KIT SUSPENSION Y ⁽¹⁾

⁽¹⁾ Otras longitudes consultar / Consult for others lengths.

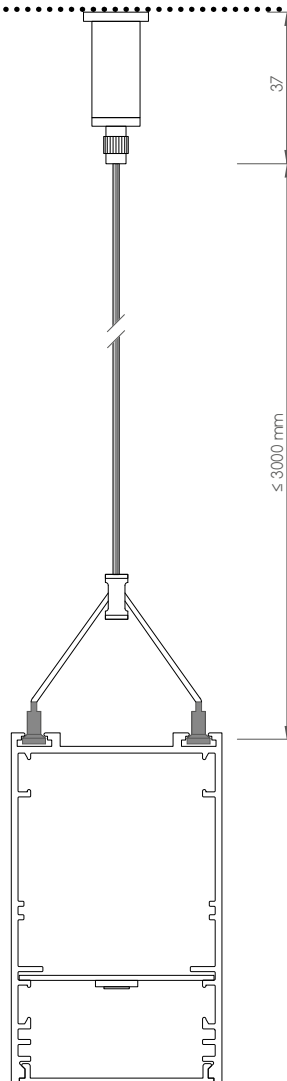


h3

qbo

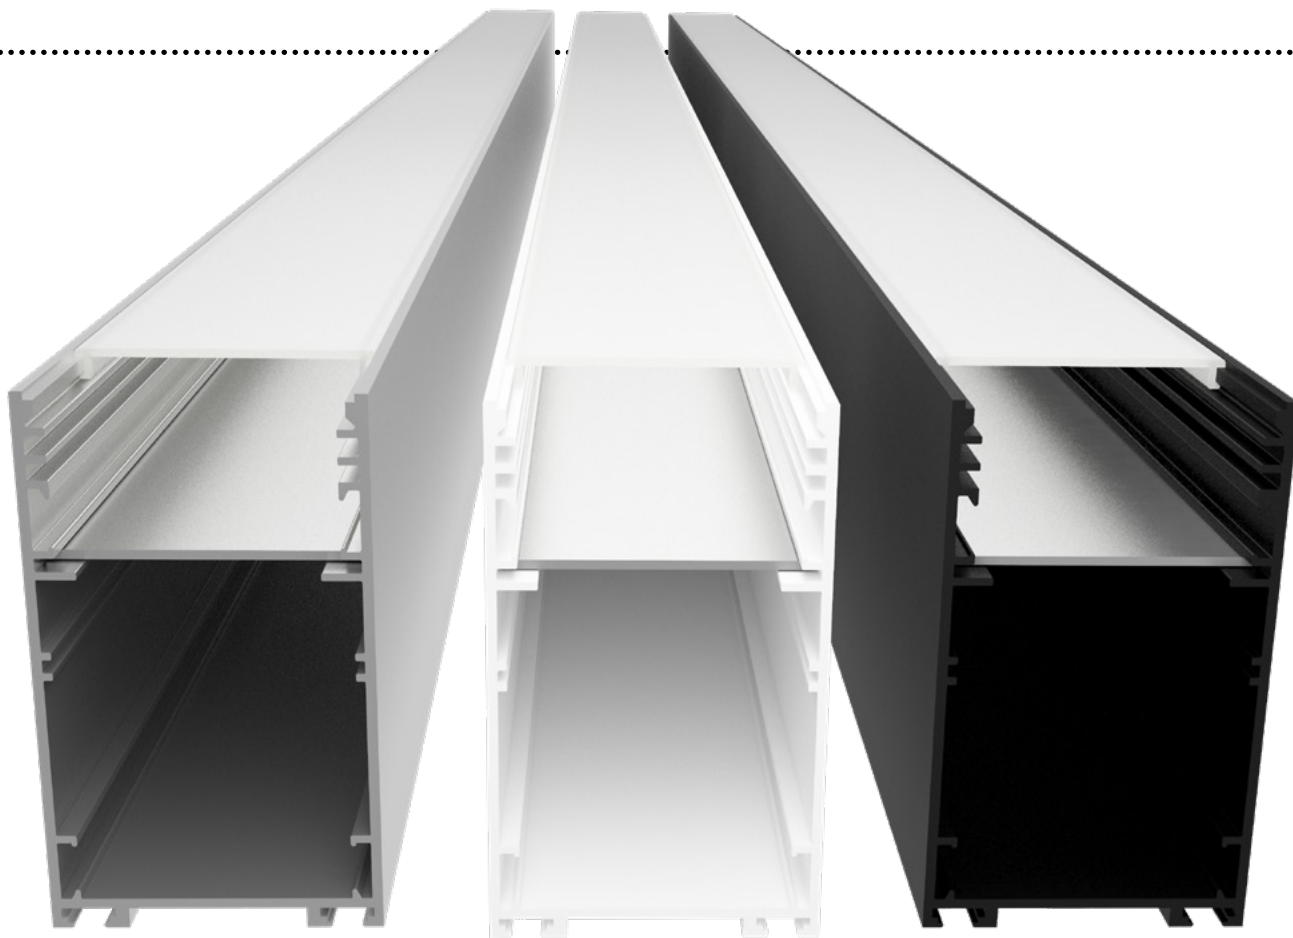

qbo

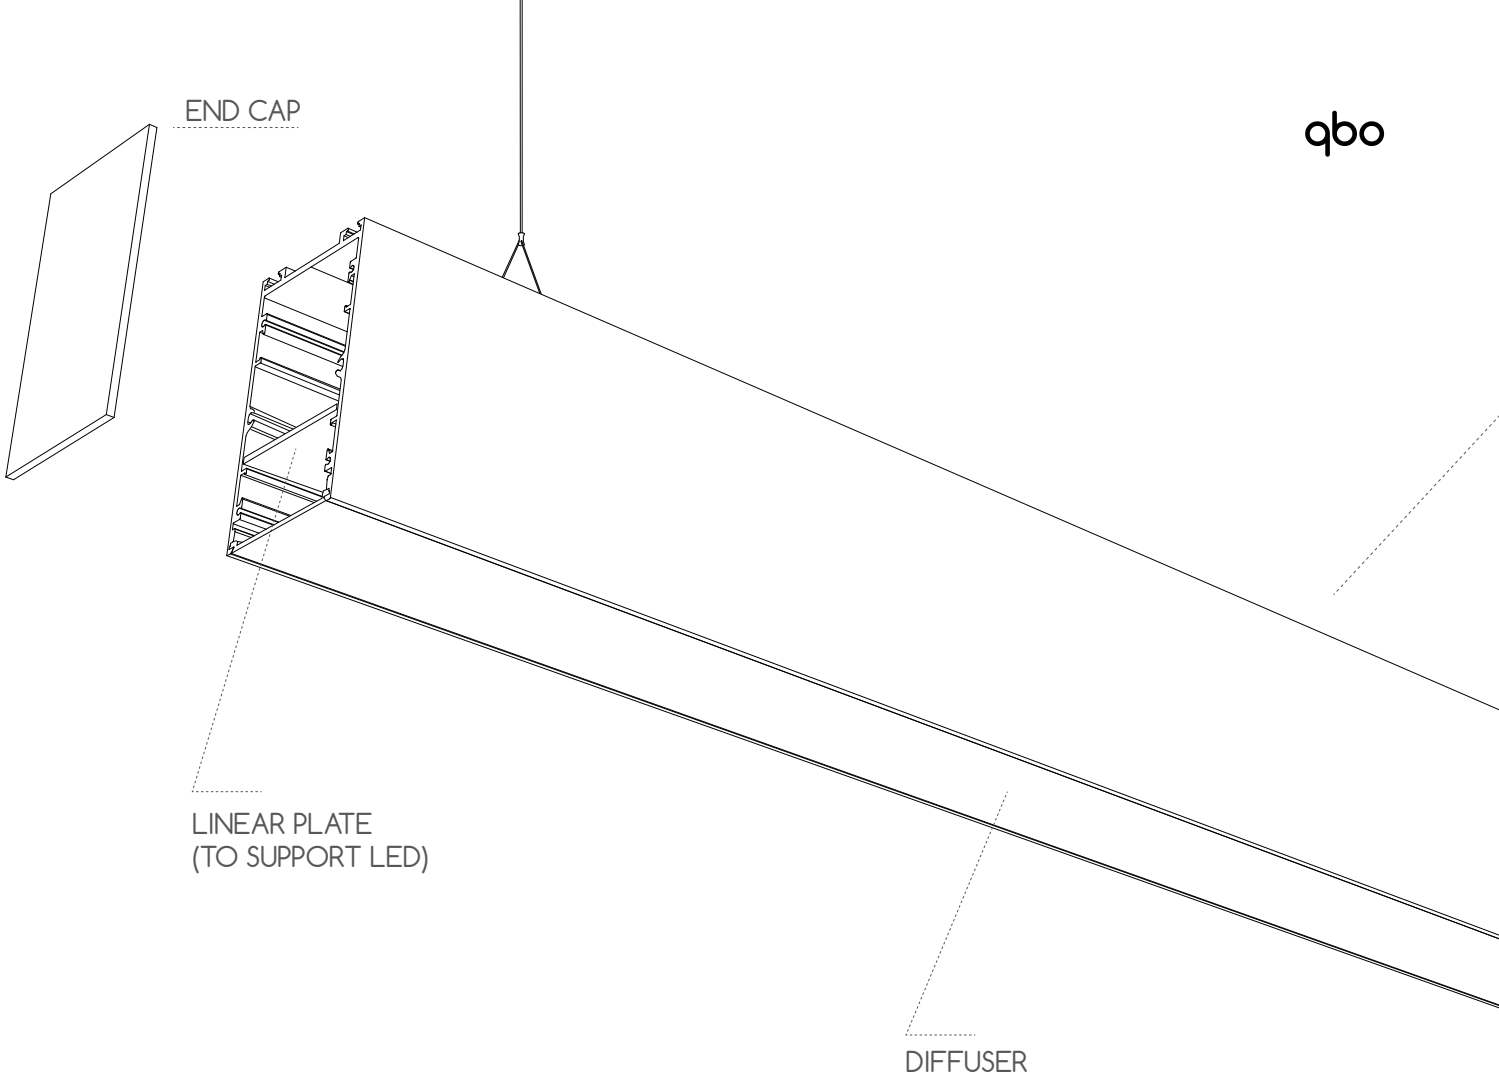

h3


h3

LINEAR UNION (x4)

h3 LUMINARIA IP55

Luminaria lineal para montaje suspendido o en superficie, acabado en aluminio natural, blanco o negro, compuesta por: Perfil de aluminio extruido con acabado anodizado de 20 micras, difusor mate plano, tira de led para emisión directa (CRI 80), equipo de clase I y tapas. IP55. Disponible en versión dali. Puede disponerse de forma de continua mediante uniones lineales y angulares. Dimensiones: 83x50x3000mm.

Linear luminaire to be installed suspended or surface, aluminium, white or black finish, composed by: 20 micron anodized extruded aluminium profile, diffuser flat frosted with ledstrip for direct light emission (CRI 80), class I driver and caps. IP55. Dali version available. Can be arranged continuously using linear or angular unions. Dimensions: 83x50x3000mm

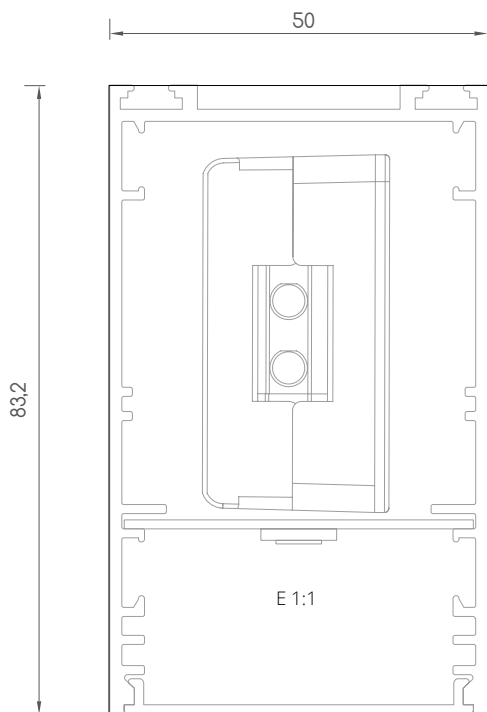

h3 LUMINARIA IP55

qbo

PH3 IP55 115,2W 120LPM

COD.	DESC.
QBOPH300115278055	PROFILE H3 115,2W 2700K RA80 9.300LM 120LPM IP55 230V 3000MM WHITE
QBOPH301115278055	PROFILE H3 115,2W 2700K RA80 9.300LM 120LPM IP55 230V 3000MM ALUMINIUM
QBOPH309115278055	PROFILE H3 115,2W 2700K RA80 9.300LM 120LPM IP55 230V 3000MM BLACK
QBOPH300115308055	PROFILE H3 115,2W 3000K RA80 9.600LM 120LPM IP55 230V 3000MM WHITE
QBOPH301115308055	PROFILE H3 115,2W 3000K RA80 9.600LM 120LPM IP55 230V 3000MM ALUMINIUM
QBOPH309115308055	PROFILE H3 115,2W 3000K RA80 9.600LM 120LPM IP55 230V 3000MM BLACK
QBOPH300115408055	PROFILE H3 115,2W 4000K RA80 9.900LM 120LPM IP55 230V 3000MM WHITE
QBOPH301115408055	PROFILE H3 115,2W 4000K RA80 9.900LM 120LPM IP55 230V 3000MM ALUMINIUM
QBOPH309115408055	PROFILE H3 115,2W 4000K RA80 9.900LM 120LPM IP55 230V 3000MM BLACK

PH3 IP55 115,2W 120LPM DALI

COD.	DESC.
QBOPH300115278055D	PROFILE H3 115,2W 2700K RA80 9.300LM 120LPM IP55 230V 3000MM WHITE DALI
QBOPH301115278055D	PROFILE H3 115,2W 2700K RA80 9.300LM 120LPM IP55 230V 3000MM ALUMINIUM DALI
QBOPH309115278055D	PROFILE H3 115,2W 2700K RA80 9.300LM 120LPM IP55 230V 3000MM BLACK DALI
QBOPH300115308055D	PROFILE H3 115,2W 3000K RA80 9.600LM 120LPM IP55 230V 3000MM WHITE DALI
QBOPH301115308055D	PROFILE H3 115,2W 3000K RA80 9.600LM 120LPM IP55 230V 3000MM ALUMINIUM DALI
QBOPH309115308055D	PROFILE H3 115,2W 3000K RA80 9.600LM 120LPM IP55 230V 3000MM BLACK DALI
QBOPH300115408055D	PROFILE H3 115,2W 4000K RA80 9.900LM 120LPM IP55 230V 3000MM WHITE DALI
QBOPH301115408055D	PROFILE H3 115,2W 4000K RA80 9.900LM 120LPM IP55 230V 3000MM ALUMINIUM DALI
QBOPH309115408055D	PROFILE H3 115,2W 4000K RA80 9.900LM 120LPM IP55 230V 3000MM BLACK DALI

Diferentes acabados disponibles bajo pedido
Other finishes available on request

PH3 IP55 57,6W 120LPM

COD.	DESC.
QBOPH300576278055	PROFILE H3 57,6W 2700K RA80 4.650LM 120LPM IP55 230V 3000MM WHITE
QBOPH301576278055	PROFILE H3 57,6W 2700K RA80 4.650LM 120LPM IP55 230V 3000MM ALUMINIUM
QBOPH309576278055	PROFILE H3 57,6W 2700K RA80 4.650LM 120LPM IP55 230V 3000MM BLACK
QBOPH300576308055	PROFILE H3 57,6W 3000K RA80 4.800LM 120LPM IP55 230V 3000MM WHITE
QBOPH301576308055	PROFILE H3 57,6W 3000K RA80 4.800LM 120LPM IP55 230V 3000MM ALUMINIUM
QBOPH309576308055	PROFILE H3 57,6W 3000K RA80 4.800LM 120LPM IP55 230V 3000MM BLACK
QBOPH300576408055	PROFILE H3 57,6W 4000K RA80 4.950LM 120LPM IP55 230V 3000MM WHITE
QBOPH301576408055	PROFILE H3 57,6W 4000K RA80 4.950LM 120LPM IP55 230V 3000MM ALUMINIUM
QBOPH309576408055	PROFILE H3 57,6W 4000K RA80 4.950LM 120LPM IP55 230V 3000MM BLACK

PH3 IP55 57,6W 120LPM DALI


COD.	DESC.
QBOPH300576278055D	PROFILE H3 57,6W 2700K RA80 4.650LM 120LPM IP55 230V 3000MM WHITE DALI
QBOPH301576278055D	PROFILE H3 57,6W 2700K RA80 4.650LM 120LPM IP55 230V 3000MM ALUMINIUM DALI
QBOPH309576278055D	PROFILE H3 57,6W 2700K RA80 4.650LM 120LPM IP55 230V 3000MM BLACK DALI
QBOPH300576308055D	PROFILE H3 57,6W 3000K RA80 4.800LM 120LPM IP55 230V 3000MM WHITE DALI
QBOPH301576308055D	PROFILE H3 57,6W 3000K RA80 4.800LM 120LPM IP55 230V 3000MM ALUMINIUM DALI
QBOPH309576308055D	PROFILE H3 57,6W 3000K RA80 4.800LM 120LPM IP55 230V 3000MM BLACK DALI
QBOPH300576408055D	PROFILE H3 57,6W 4000K RA80 4.950LM 120LPM IP55 230V 3000MM WHITE DALI
QBOPH301576408055D	PROFILE H3 57,6W 4000K RA80 4.950LM 120LPM IP55 230V 3000MM ALUMINIUM DALI
QBOPH309576408055D	PROFILE H3 57,6W 4000K RA80 4.950LM 120LPM IP55 230V 3000MM BLACK DALI

COD.	DESC.
QBOPH3F	PROFILE H3 FIXING CLIP (1 UNIT)
QBOKITSUSPY	PROFILE KIT SUSPENSION Y ⁽¹⁾

h3 SPOT

Accesorio downlight para conformar luminarias lineales. Se compone de placa LED Tridonic fabricada en Europa de alta eficiencia y fácil disipación de calor, así como de un reflector LEDIL que garantiza la mayor calidad de emisión de luz y un bajo nivel de deslumbramiento, idóneo para espacios en los que la normativa lo requiera. Fácil instalación en perfil mediante pletina magnética. Driver alojable en el interior del perfil. Disponible en versiones no regulable, regulable dali y tunable White. Longitudes disponibles: 14cm, 28cm, 56cm y 1120cm.

Downlight accessory to compose linear luminaires. Made out of a combination of Tridonic LED plate manufactured in Europe with high efficiency and easy heat dissipation, as well as a LEDIL reflector that guarantees the highest quality of light emission and a low level of glare, ideal for spaces where regulations require it. Easy installation in profile by magnetic plate. Feeder kit can be housed inside the profile. Available in non-dimmable, dimmable dali and tunable White versions. Available lengths: 14cm, 28cm, 56cm and 1120cm.

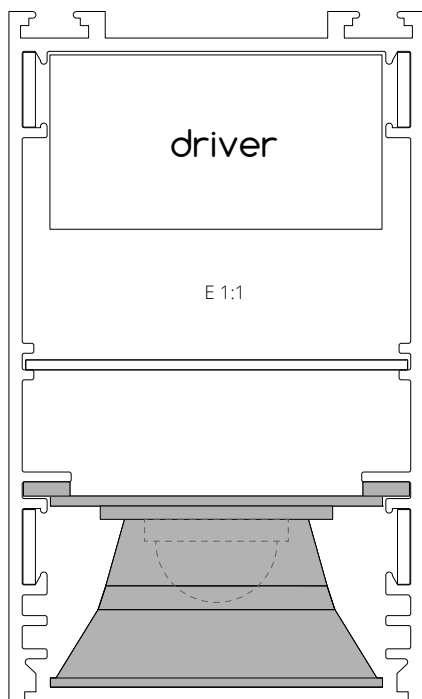

PERFIL ALUMINIO / ALUMINIUM PROFILE

140 mm

SPOT4

280 mm

SPOT7

560 mm

SPOT14

1120 mm

SPOT28



qbo

H3 SPOT 4 (140mm)

COD.	DESC.
QBOPH3SP43050.140	PROFILE H3 SPOT4 6,7W 3000K 50° Ra90 1130lm
QBOPH3SP43080.140	PROFILE H3 SPOT4 6,7W 3000K 80° Ra90 1130lm
QBOPH3SP44050.140	PROFILE H3 SPOT4 6,7W 4000K 50° Ra90 1130lm
QBOPH3SP44080.140	PROFILE H3 SPOT4 6,7W 4000K 80° Ra90 1130lm
QBOPH3SP4276550.140	PROFILE H3 SPOT4 3,9W 2700K-6500K 50° Ra90 570lm-620lm
QBOPH3SP4276580.140	PROFILE H3 SPOT4 3,9W 2700K-6500K 80° Ra90 570lm-620lm

H3 SPOT 14 (560mm)

COD.	DESC.
QBOPH3SP143050.560	PROFILE H3 SPOT14 23,6W 3000K 50° Ra90 4140lm
QBOPH3SP143080.560	PROFILE H3 SPOT14 23,6W 3000K 80° Ra90 4140lm
QBOPH3SP144050.560	PROFILE H3 SPOT14 23,6W 4000K 50° Ra90 4330lm
QBOPH3SP144080.560	PROFILE H3 SPOT14 23,6W 4000K 80° Ra90 4330lm
QBOPH3SP14276550.560	PROFILE H3 SPOT14 11,8W 2700K-6500K 50° Ra90 2010lm-2170lm
QBOPH3SP14276580.560	PROFILE H3 SPOT14 11,8W 2700K-6500K 80° Ra90 2010lm-2170lm

H3 SPOT 7 (280mm)

COD.	DESC.
QBOPH3SP73050.280	PROFILE H3 SPOT7 11,8W 3000K 50° Ra90 2070lm
QBOPH3SP73080.280	PROFILE H3 SPOT7 11,8W 3000K 80° Ra90 2070lm
QBOPH3SP74050.280	PROFILE H3 SPOT7 11,8W 4000K 50° Ra90 2160lm
QBOPH3SP74080.280	PROFILE H3 SPOT7 11,8W 4000K 80° Ra90 2160lm
QBOPH3SP7276550.280	PROFILE H3 SPOT7 5,9W 2700K-6500K 50° Ra90 1000lm-1080lm
QBOPH3SP7276580.280	PROFILE H3 SPOT7 5,9W 2700K-6500K 80° Ra90 1000lm-1080lm

H3 SPOT 28 (1120mm)

COD.	DESC.
QBOPH3SP284723050.1120	PROFILE H3 SPOT28 23,6W 3000K 50° Ra90 4140lm
QBOPH3SP284723080.1120	PROFILE H3 SPOT28 23,6W 3000K 80° Ra90 4140lm
QBOPH3SP284724050.1120	PROFILE H3 SPOT28 23,6W 4000K 50° Ra90 4330lm
QBOPH3SP284724080.1120	PROFILE H3 SPOT2823,6W 4000K 80° Ra90 4330lm
QBOPH3SP28236276550.1120	PROFILE H3 SPOT28 11,8W 2700K-6500K 50° Ra90 2010lm-2170lm
QBOPH3SP28236276580.1120	PROFILE H3 SPOT28 11,8W 2700K-6500K 80° Ra90 2010lm-2170lm

DRIVERS

NOT DIMMABLE:

COD.	DESC.
SPOT4ND	SPOT4 NOT DIMMABLE DRIVER 10W 300mA
SPOT7ND	SPOT7 NOT DIMMABLE DRIVER 25W 300mA
SPOT14ND	SPOT14 NOT DIMMABLE DRIVER 50W 600mA
SPOT28ND	SPOT28 NOT DIMMABLE DRIVER 75W 1200mA

DIMMABLE:

COD.	DESC.
SPOT4DL	SPOT4 DALI DRIVER 10W 300mA
SPOT7DL	SPOT7 DALI DRIVER 35W 300mA
SPOT14DL	SPOT14 DALI DRIVER 35W 600mA
SPOT28DL	SPOT28 DALI DRIVER 75W 1200mA

TUNEABLE WHITE:

COD.	DESC.
SPOT4TW	SPOT4 TUNEABLE WHITE DRIVER 15W 150mA
SPOT7TW	SPOT7 TUNEABLE WHITE DRIVER 15W 150mA
SPOT14TW	SPOT14 TUNEABLE WHITE DRIVER 15W 300mA
SPOT28TW	SPOT28 TUNEABLE WHITE DRIVER 50W 600mA

h3 ayer

qbo



ayer micro linear plate

COD.	DESC.
QBOPH3PAYMC.1	PROFILE H3 AYER MICRO LINEAR PLATE 1 UNIT
QBOPH3PAYMC.2	PROFILE H3 AYER MICRO LINEAR PLATE 2 UNITS
QBOPH3PAYMC.3	PROFILE H3 AYER MICRO LINEAR PLATE 3 UNITS
QBOPH3PAYMC.1D	PROFILE H3 AYER MICRO LINEAR PLATE 1 UNIT DALI
QBOPH3PAYMC.2D	PROFILE H3 AYER MICRO LINEAR PLATE 2 UNITS DALI
QBOPH3PAYMC.3D	PROFILE H3 AYER MICRO LINEAR PLATE 3 UNITS DALI

