

qbo
p2+1

p2+1

Perfil de aluminio extruido con acabado anodizado de 20 micras para montaje en superficie, suspendido o empotrado. Difusor plano disponible para su inserción tanto en la parte superior como en la inferior del perfil, para permitir la emisión de luz directa e indirecta. El equipo de alimentación puede alojarse en el interior del perfil o instalarse de forma remota. El perfil cuenta con tapas finales y puede montarse en forma de continua mediante uniones lineales y angulares. Dimensiones: 80x30x3000mm.


20 micron anodized extruded aluminum profile that can be installed on surface, suspended or recessed. Flat diffusers are available to be set at the top and/or bottom of the profile to allow indirect/direct light emission. Power supply unit can be housed inside the profile or placed remotely. The profile can be closed with end caps and can be arranged continuously using linear or angular unions. Dimensions: 80x30x3000mm.



| COD. | DESC. |
|---------------|---|
| QBOP2+1 | PROFILE 2+1 30X80 3000 mm ① |
| QBOP2+1H | PROFILE 2+1 HEATSINK 3000MM ② |
| QBOP31X31DF | PROFILE 31X31 DIFFUSER FROSTED 3000 mm ③ |
| QBOP31X31DP | PROFILE 31X31 DIFFUSER PRISMATIC 3000MM ③ |
| QBOP2+1DF | PROFILE 2+1 DIFFUSER FROSTED 3000MM ④ |
| QBOP2+1P.1000 | PROFILE 2+1 LINEAR PLATE 1000MM ⑤ |
| QBOP2+1P.2000 | PROFILE 2+1 LINEAR PLATE 2000MM ⑤ |


Diferentes acabados y opciones de protección IP disponibles bajo pedido
Other finishes and IP ratings available on request



* Ver compatibilidad en el alojamiento de equipos en DRIVERS.
See drivers housing compatibility in DRIVERS.

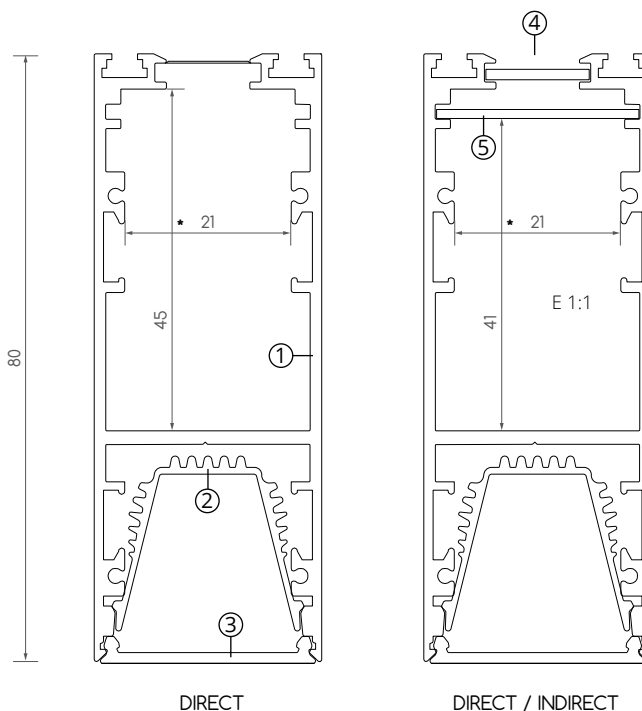

.....
p2+1

qbo


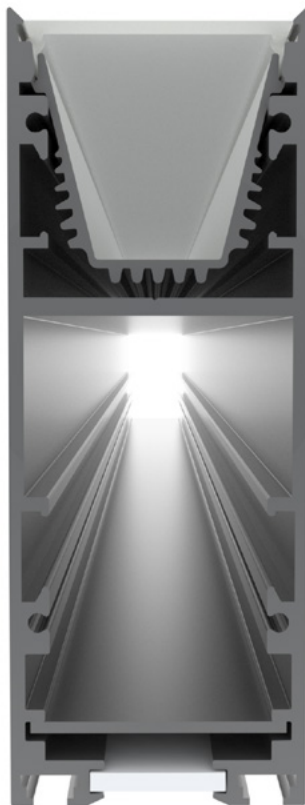


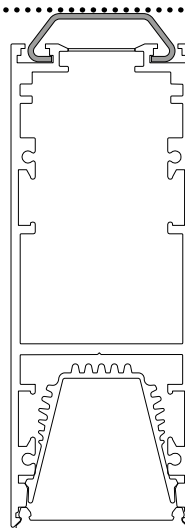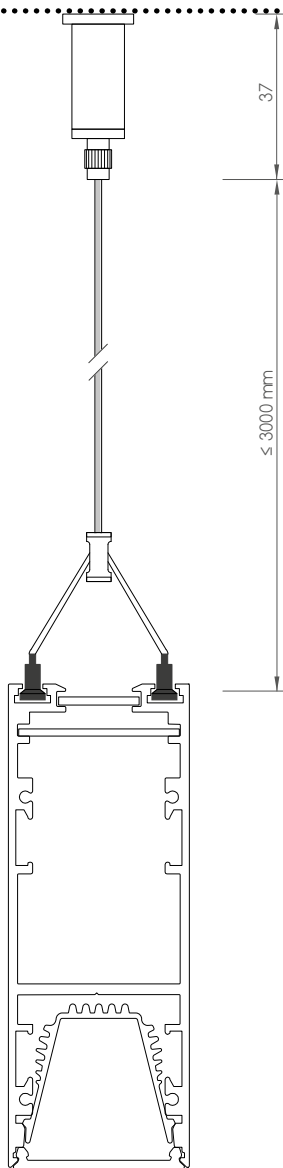

| COD. | DESC. |
|----------|-------------------------|
| QBOP2+1F | PROFILE 2+1 FIXING CLIP |

| COD. | DESC. |
|-------------|---|
| QBOKITSUSPY | PROFILE KIT SUSPENSION Y ⁽¹⁾ |

⁽¹⁾ Otras longitudes consultar / Consult for others lengths.

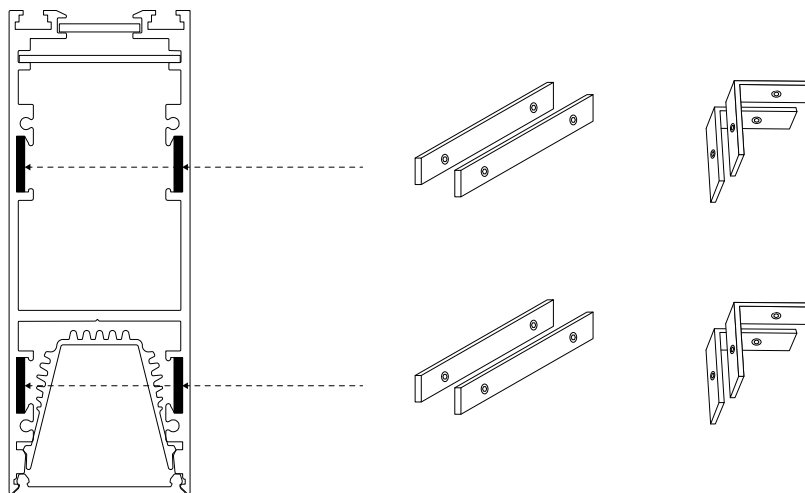


| COD. | DESC. |
|-----------|--|
| QBOP04UL | PROFILE 04 9X1MM LINEAR UNION (4 UNITS) |
| QBOP04UAE | PROFILE 04 9X1MM ANGULAR UNION (4 UNITS) |

| COD. | DESC. |
|----------|-------------------------------|
| QBOP2+1C | PROFILE 2+1 END CAP (2 UNITS) |


p2+1 LUMINAIRE

Luminaria lineal para montaje suspendido, compuesta por: Perfil de aluminio extruido con acabado anodizado de 20 micras, difusores mate planos con tiras de led para emisión directa e indirecta (CRI 80) y Equipo clase II. Disponible en versión dali.

Linear luminaire to be installed suspended, composed by: 20 micron anodized extruded aluminium profile, diffusers flat frosted with ledstrips for direct and indirect light emission (CRI 80) as well as class II driver. Dali version available.

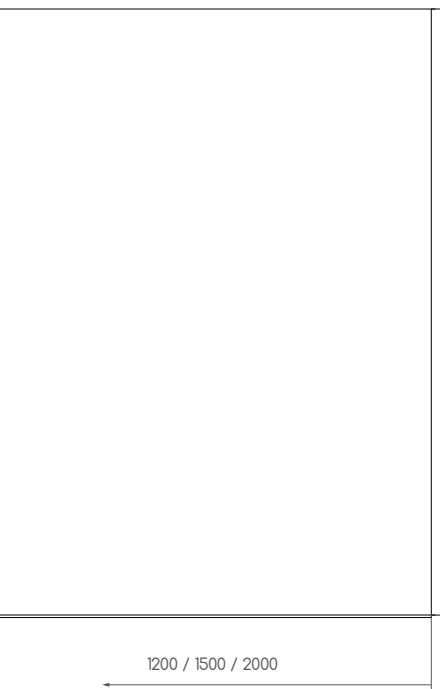

E 1:1

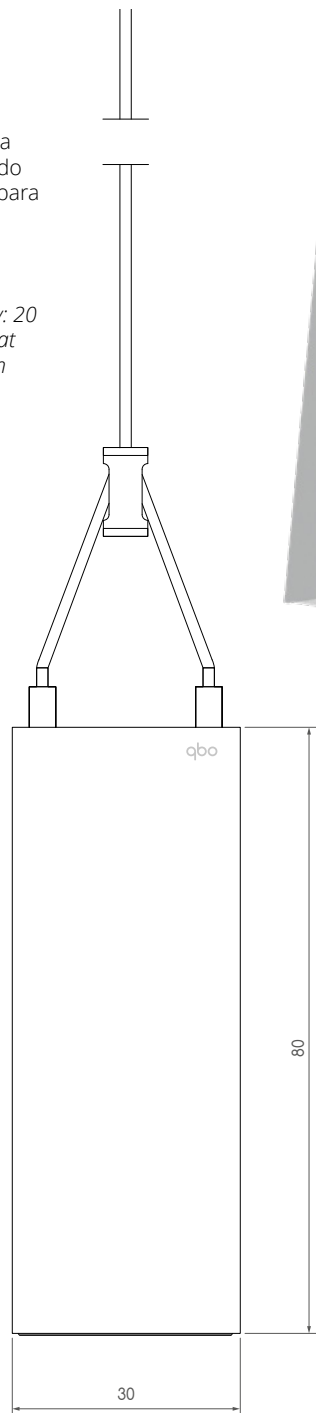

qbo

p2+1 LUMINAIRE

SUSPENDIDA / SUSPENDED

| COD. | DESC. |
|----------------|--|
| QBOP2+Y278012 | PROFILE 2+1 suspended 34,6W 2700K Ra80 D2100lm I936lm IP20 1200mm |
| QBOP2+Y278015 | PROFILE 2+1 suspended 43,2W 2700K Ra80 D2625lm I1170lm IP20 1500 mm |
| QBOP2+Y278020 | PROFILE 2+1 suspended 57,6W 2700K Ra80 D3500lm I1560lm IP20 2000mm |
| QBOP2+Y2780D12 | PROFILE 2+1 suspended 34,6W 2700K Ra80 D2100lm I936lm IP20 dali 1200mm |
| QBOP2+Y2780D15 | PROFILE 2+1 suspended 43,2W 2700K Ra80 D2625lm I1170lm IP20 dali 1500 mm |
| QBOP2+Y2780D20 | PROFILE 2+1 suspended 57,6W 2700K Ra80 D3500lm I1560lm IP20 dali 2000mm |

Diferentes acabados y opciones de protección IP disponibles bajo pedido
Other finishes and IP ratings available on request

