


flexy^{ECO}

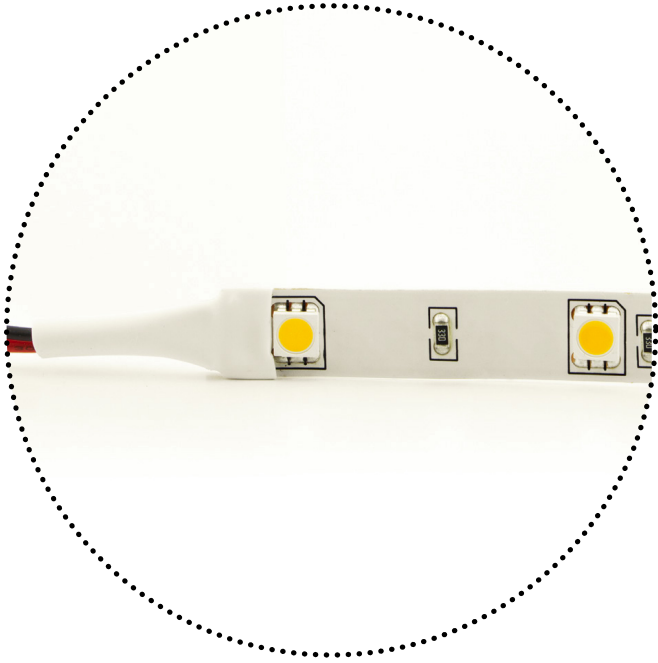

RANGE	QBO FLEXY ECO
REF.	05075-
TYPE	LEDSTRIP
DIMENSIONS	10 x 5000 mm
CUT UNIT	125 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	(ø 0,5 mm) 5000 mm
GAP BETWEEN LEDs	16 mm
WEIGHT	0,145 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	7,56 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	80
MACADAM ELLIPSE	2
LPM	48 lpm
OPENING DEGREES	120 °
WARRANTY	3 YEARS

*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	540	71,4
2700	580	76,7
3000	600	79,4
4000	620	82
6500	615	81,3



CODE	DESCRIPTION
0507522580	LEDSTRIP FLEXY Eco 7,56W/m 2200K 5m Ra80 540lm/m 48leds/m IP20 24V
0507527580	LEDSTRIP FLEXY Eco 7,56W/m 2700K 5m Ra80 580lm/m 48leds/m IP20 24V
0507530580	LEDSTRIP FLEXY Eco 7,56W/m 3000K 5m Ra80 600lm/m 48leds/m IP20 24V
0507540580	LEDSTRIP FLEXY Eco 7,56W/m 4000K 5m Ra80 620lm/m 48leds/m IP20 24V
0507565580	LEDSTRIP FLEXY Eco 7,56W/m 6500K 5m Ra80 615lm/m 48leds/m IP20 24V

