


## flexy ECO HO

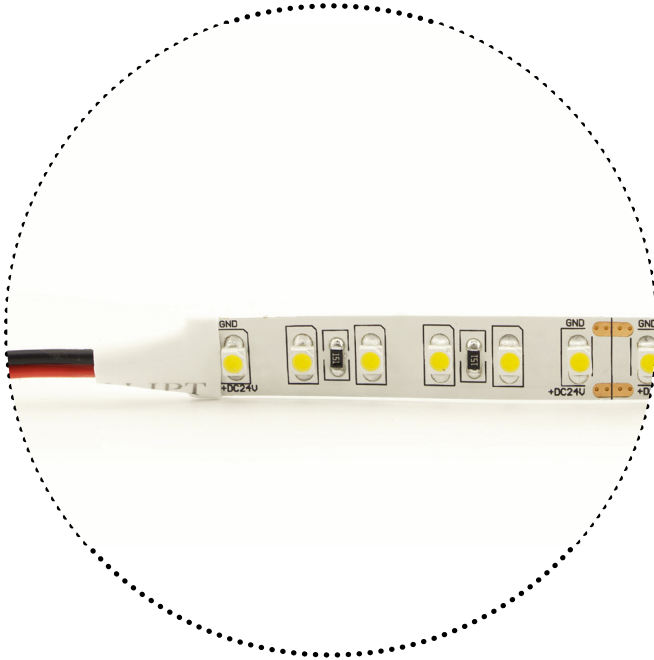

RANGE	QBO FLEXY ECO HO
REF.	11096-
TYPE	LEDSTRIP
DIMENSIONS	10 x 5000 mm
CUT UNIT	50 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	(ø 0,5 mm) 3000 mm
GAP BETWEEN LEDS	5,5 mm
WEIGHT	0,135 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	9,6 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	80
MACADAM ELLIPSE	2
LPM	120 lpm
OPENING DEGREES	120°
WARRANTY	3 YEARS

\*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	740	77,1
2400	760	79,2
2700	780	81,2
3000	785	81,8
4000	810	84,4
6500	800	83,3



CODE	DESCRIPTION
1109622580	LEDSTRIP FLEXY EcoHO 9,6W/m 2200K 5m Ra80 740lm/m 120leds/m IP20 24V
1109624580	LEDSTRIP FLEXY EcoHO 9,6W/m 2400K 5m Ra80 760lm/m 120leds/m IP20 24V
1109627580	LEDSTRIP FLEXY EcoHO 9,6W/m 2700K 5m Ra80 780lm/m 120leds/m IP20 24V
1109630580	LEDSTRIP FLEXY EcoHO 9,6W/m 3000K 5m Ra80 785lm/m 120leds/m IP20 24V
1109640580	LEDSTRIP FLEXY EcoHO 9,6W/m 4000K 5m Ra80 810lm/m 120leds/m IP20 24V
1109665580	LEDSTRIP FLEXY EcoHO 9,6W/m 6500K 5m Ra80 800lm/m 120leds/m IP20 24V

