


## flexy ECO HO IP

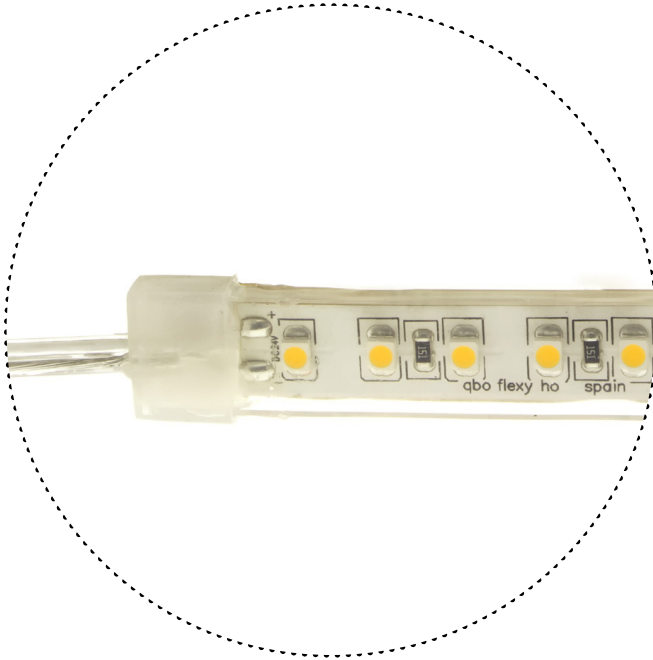

RANGE	QBO FLEXY ECO HO
REF.	11096-
TYPE	LEDSTRIP
DIMENSIONS	13 x 5000 mm
CUT UNIT	50 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	(ø 0,5 mm) 3000 mm
GAP BETWEEN LEDS	5,5 mm
WEIGHT	0,285 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	9,6 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP67
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	90
MACADAM ELLIPSE	5
LPM	120 lpm
OPENING DEGREES	120°
WARRANTY	3 YEARS

\*DOES NOT NEED DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	650	67,7
2700	690	71,9
3000	695	72,4
4000	720	75
6500	715	74,5



CODE	DESCRIPTION
110962259067	LEDSTRIP FLEXY EcoHO 9,6W/m 2200K 5m RA90 650lm/m 120leds/m IP67 24V
110962759067	LEDSTRIP FLEXY EcoHO 9,6W/m 2700K 5m RA90 690lm/m 120leds/m IP67 24V
110963059067	LEDSTRIP FLEXY EcoHO 9,6W/m 3000K 5m RA90 695lm/m 120leds/m IP67 24V
110964059067	LEDSTRIP FLEXY EcoHO 9,6W/m 4000K 5m RA90 720lm/m 120leds/m IP67 24V
110966559067	LEDSTRIP FLEXY EcoHO 9,6W/m 6500K 5m RA90 715lm/m 120leds/m IP67 24V

