


flexy^{ECO}

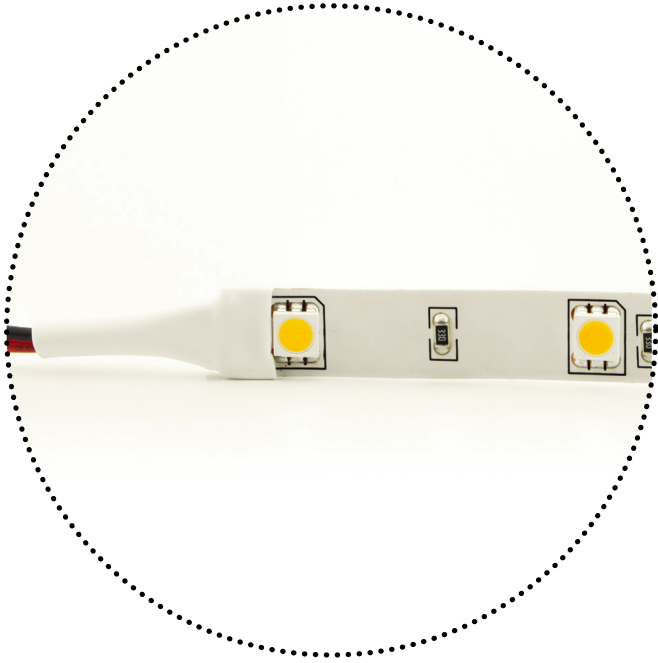

RANGE	QBO FLEXY ECO
REF.	05075-
TYPE	LEDSTRIP
DIMENSIONS	10 x 5000 mm
CUT UNIT	125 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	(ø 0,5 mm) 5000 mm
GAP BETWEEN LEDs	16 mm
WEIGHT	0,145 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	7,56 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	90
MACADAM ELLIPSE	2
LPM	48 lpm
OPENING DEGREES	120 °
WARRANTY	3 YEARS

*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	440	58,2
2700	480	63,5
3000	500	66,1
4000	520	68,8
6500	515	68,1



CODE	DESCRIPTION
0507522590	LEDSTRIP FLEXY Eco 7,56W/m 2200K 5m Ra90 440lm/m 48leds/m IP20 24V
0507527590	LEDSTRIP FLEXY Eco 7,56W/m 2700K 5m Ra90 480lm/m 48leds/m IP20 24V
0507530590	LEDSTRIP FLEXY Eco 7,56W/m 3000K 5m Ra90 500lm/m 48leds/m IP20 24V
0507540590	LEDSTRIP FLEXY Eco 7,56W/m 4000K 5m Ra90 520lm/m 48leds/m IP20 24V
0507565590	LEDSTRIP FLEXY Eco 7,56W/m 6500K 5m Ra90 515lm/m 48leds/m IP20 24V

