


flexy ECO HO

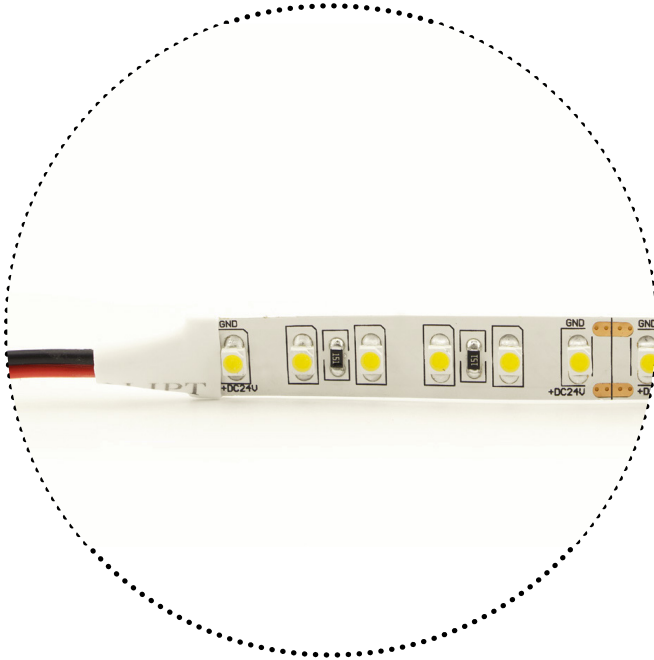

RANGE	QBO FLEXY ECO HO
REF.	11096-
TYPE	LEDSTRIP
DIMENSIONS	10 x 5000 mm
CUT UNIT	50 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	10000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	(ø 0,5 mm) 3000 mm
GAP BETWEEN LEDS	5,5 mm
WEIGHT	0,135 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	9,6 W
SERVICE LIFE	> 50000 HRS
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	90
MACADAM ELLIPSE	2
LPM	120 lpm
OPENING DEGREES	120°
WARRANTY	3 YEARS

*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	650	67,7
2400	670	69,8
2700	690	71,9
3000	695	72,4
4000	720	75
6500	715	74,5



CODE	DESCRIPTION
1109622590	LEDSTRIP FLEXY EcoHO 9,6W/m 2200K 5m Ra90 650lm/m 120leds/m IP20 24V
1109624590	LEDSTRIP FLEXY EcoHO 9,6W/m 2400K 5m Ra90 670lm/m 120leds/m IP20 24V
1109627590	LEDSTRIP FLEXY EcoHO 9,6W/m 2700K 5m Ra90 690lm/m 120leds/m IP20 24V
1109630590	LEDSTRIP FLEXY EcoHO 9,6W/m 3000K 5m Ra90 695lm/m 120leds/m IP20 24V
1109640590	LEDSTRIP FLEXY EcoHO 9,6W/m 4000K 5m Ra90 720lm/m 120leds/m IP20 24V
1109665580	LEDSTRIP FLEXY EcoHO 9,6W/m 6500K 5m Ra90 715lm/m 120leds/m IP20 24V

