


flexy HO IP

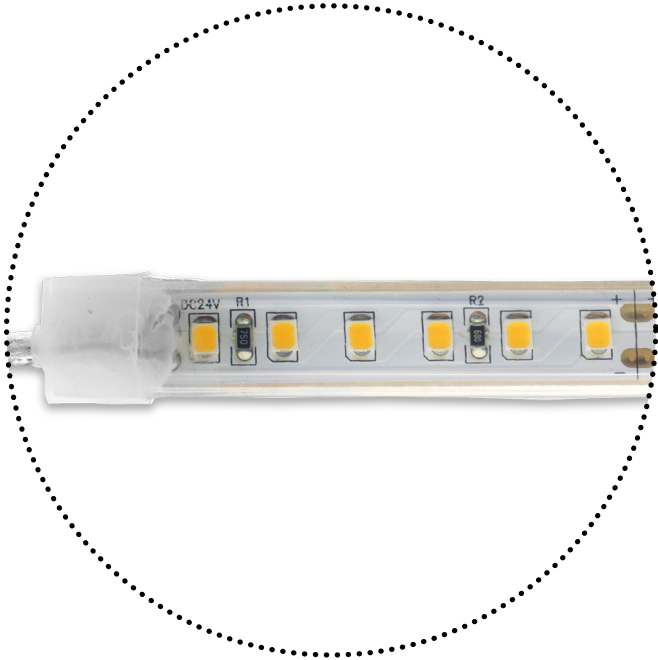

RANGE	QBO FLEXY HO
REF.	01192-
TYPE	LEDSTRIP
DIMENSIONS	13 x 5000 mm
CUT UNIT	50 mm
MINIMUM BENDING DIAMETRE	50 mm
MAXIMUM RUN LENGTH	5000 mm
MAXIMUM CABLE LENGTH (FOR MAX RUN LENGTH)	($\phi=0,5$ mm) 1500 mm
GAP BETWEEN LEDS	5 mm
WEIGHT	0,300 Kg
VOLTAGE	24 V
DIMMABLE	YES
POWER	19,2 W
SERVICE LIFE	> 50.000 HRS
IP RATING	IP67
LIGHTING DISTRIBUTION	DIRECT / INDIRECT
CRI	90
MACADAM ELLIPSE	2
LPM	120 lpm
OPENING DEGREES	140 °
WARRANTY	5 YEARS

*NEEDS DISSIPATION

COLOR TEMPERATURE (K)	LIGHTING FLUX (lm)	LUMINOUS EFFICACY (lm/W)
2200	1350	70,3
2700	1490	77,6
3000	1580	82,3
4000	1620	84,4
6500	1580	82,3



CODE	DESCRIPTION
011922259067	LEDSTRIP FLEXY HO IP 19,2W/m 2200K 5m Ra90 1350lm/m 120leds/m IP67 24V
011922759067	LEDSTRIP FLEXY HO IP 19,2W/m 2700K 5m Ra90 1490lm/m 120leds/m IP67 24V
011923059067	LEDSTRIP FLEXY HO IP 19,2W/m 3000K 5m Ra90 1580lm/m 120leds/m IP67 24V
011924059067	LEDSTRIP FLEXY HO IP 19,2W/m 4000K 5m Ra90 1620lm/m 120leds/m IP67 24V
011926559067	LEDSTRIP FLEXY HO IP 19,2W/m 6500K 5m Ra90 1580lm/m 120leds/m IP67 24V

