


## profile 19x16

RANGE	PROFILE 19X16
REF.	QBOP19X16-
TYPE	SURFACE PROFILE
DIMENSIONS	16 x 21,5 x 2000 mm
WEIGHT	0,91 kg
PERFIL MATERIAL	ALUMINIUM
PERFIL ALLOY	6063
PERFIL RESISTANCE	T5
PERFIL ANODIZE	20µm
PERFIL FINISH	ALUMINIUM
VOLTAGE	24 V
FEEDER KIT	NOT INCLUDED
DIMMABLE	YES
POWER	25 W/m
SERVICE LIFE	30.000 h
IP RATING	IP20
LIGHTING DISTRIBUTION	DIRECT
COLOR TEMPERATURE	3000 K
CRI	80
OPENING DEGREES	8°
LIGHTIN FLUX	2000 lm/m
LUMINOUS EFFICACY	160 lm/W

Todos los perfiles qbo se extruyen a partir de la aleación 6063 de aluminio reciclado de segunda fusión.  
All qbo profiles are extruded from 6063 recycled aluminum alloy, at least second fusion.

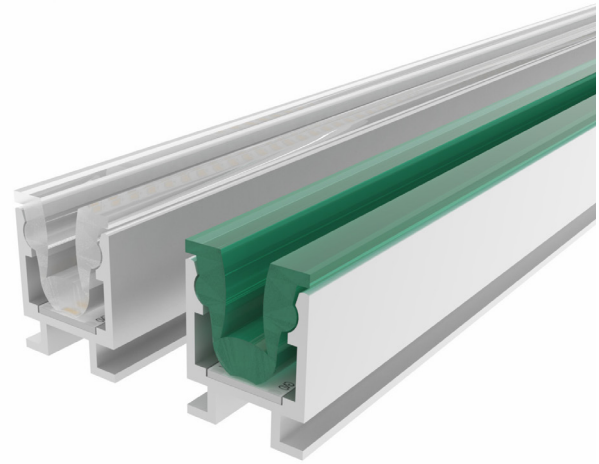

CODE	DESCRIPTION
QBOP19X1625308020	PROFILE 19x16 2000mm WITH LEDSTRIP 25W/M 3000K RA80 IP20
QBOP19X16	PROFILE 19x16 2000mm
QBOP19X16LT	PROFILE 19x16 Lens Transparent 8° 2000mm
QBOP19X16LG	PROFILE 19x16 Lens Green 8° 2000mm
QBOP19X16C	PROFILE 19x16 End caps (1 units)
QBOP19X16CH	PROFILE 19x16 End caps with cable hole (1 units)
QBOP19X16F	PROFILE 19x16 Fixing clips (4 units)

